

LUNISOL X - ILLUMINATED TOP PLATE

TECHNICAL
DATASHEET

SPECIFICATIONS

The LUNISOL X transparent illuminated top plate consists of a single piece and is equipped with four vertical spacers. The spacers are 20 mm high. This top plate is combined with a Comfort adjustable pedestal of your choice and is designed to support tiles. The spacers cannot be broken off. The top plate comes with a connected cable. This cable must be connected to the Casambi controller, which in turn must be connected to the transformer from the LUNISOL range. The cable between the top plate and the Casambi controller can be extended to a maximum length of 30 metres. The maximum installation height with transformer is 4 cm.

Colour	Transparent, with app-controlled adjustable light colour.
Joint width	3 mm
Diameter	127 mm
Weight	0,112 kg/piece
Spacer height	20 mm
Light source	led - RGBW



 Weather-resistant


 Resistant to temperatures between -20 and +45 °C

 Load capacity: 2.400 kg/m²

IP 67 Completely dust-tight and resistant to temporary immersion in water

PP Polypropylene

COMFORT PEDESTALS

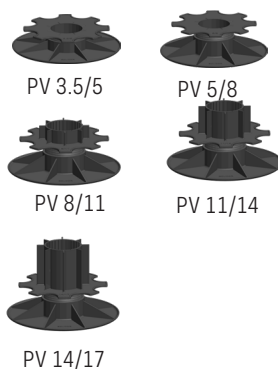

COMPATIBLE ACCESSORIES LUNISOL X


Protective rubber
Lunisol

Extension pieces


F30


AF100

Power and casambi


Transformer


Casambi

LIGHTING COMBINATION OPTIONS



Lunisol L
LED strip edge

PACKAGING

Box

The package contains the top plate and the LUNISOL protective rubber. Sold individually.

Box dimensions: 276 × 206 × 105 mm

Discover our contribution
to a more sustainable
world:



SPECIFICATIONS

The LUNISOL X is installed on a SOLIDOR adjustable pedestal of your choice. The cable from the illuminated top plate runs through the neck of the adjustable pedestal.

A LUNISOL protective rubber pad must be installed underneath the pedestal. It consists of a single piece and features an opening through which the cable can be routed.

This accessory is made from recycled rubber and provides sound-dampening and shock-absorbing properties while remaining water-permeable.

Kleur	zwart
Hoogte	6 mm
Afmeting	210 x 210 mm
Gewicht	kg/stuk



Recycled material



Weather-resistant



Resistant to temperatures between
-25 and + 70°C

PACKAGING

Per piece

Discover our contribution
to a more sustainable
world:

