


SPECIFICATION


LUNISOL X is a transparent PP top plate that connects to the transformer from the Lunisol range. The top plate is used in combination with a Comfort PV pedestal. Up to 9 top plates can be connected per transformer. An app allows you to select different colours.

Joint width	3 mm
Diameter	123 mm
Colour	Transparent
Height upstands	20 mm
Light source	led - RGBW
Weight	0,282 kg



COMFORT PEDESTALS

-  Weather-resistant
-  Resistant to temperatures between -25 and +70 °C
-  Load capacity: 2.400 kg/m²
- IP67** IP67 protection rating: fully dust-tight and protected against temporary immersion in water

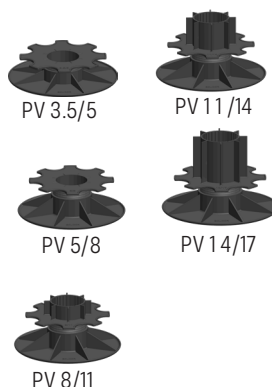

COMFORT ACCESSORIES IN COMBINATION WITH LUNISOL X



PACKAGING


per piece

Important: minimum build-up height of 35 mm for the terrace.

Discover here our contribution to a sustainable world:



INSTALLATION STEP-BY-STEP GUIDE

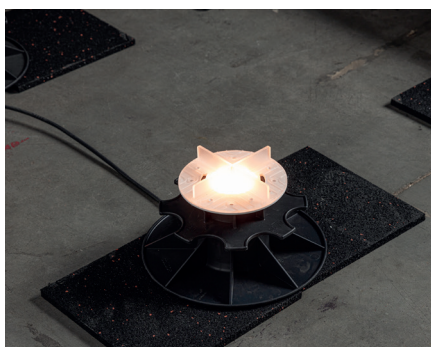

STEP 1

Place a protective rubber Lunisol underneath the pedestal.




STEP 2

The cable is placed in the designated opening of the Lunisol protective rubber.




STEP 3

Place the top plate on the terrace pedestal.

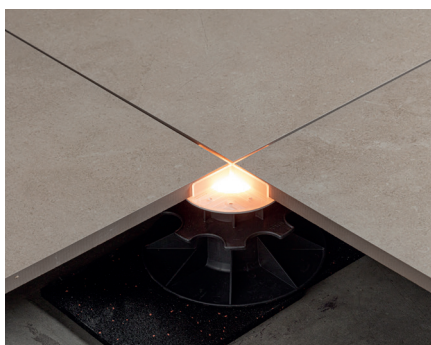

STEP 4

Connect the cable and plug it into the socket.

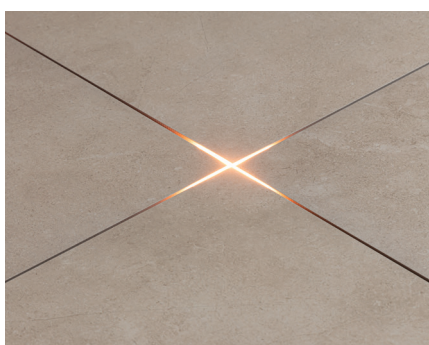

STEP 5

Connect with the app.



STEP 6

Select your desired colour and ambiance via your smartphone.