

SOLIDOR

QUESTIONS?

Kouterstraat 11 b
8560 Wevelgem
Belgium

T +32 56 41 35 70
info@solidor.be

solidor.be/en

A SIMPLE AND MODULAR TERRACE SYSTEM THAT ADAPTS TO ANY SITUATION AND ENVIRONMENT

Our terrace pedestals are produced from recycled plastics - minimizing environmental impact and enabling circular reuse.
- Henri Dejans, Managing Director, SOLIDOR

Since 1978, SOLIDOR has been a pioneer in adjustable terrace pedestals and levelling systems. Our solutions make the installation of terraces, floors, wooden façades and ceilings simple, flexible and durable.

Circular: SOLIDOR decking pedestals are manufactured from recycled plastics to ensure a minimal environmental impact. Our production process is waste-free, and used pedestals can be reused or reprocessed in-house, ensuring a fully circular lifecycle. In addition, our aluminum profiles are among those with the lowest CO² footprint on the market.

Extensive product range: Alongside fixed and adjustable decking pedestals, SOLIDOR also produces the CRIX levelling system and the LINUP system - designed for cladding wooden façades, ceilings and terraces without visible screws.

Tested and proven: Our (adjustable) decking pedestals are a proven system that has been used since 1978 in a wide range of outdoor applications. Our systems undergo continuously tested and are stable, wind-resistant and water-permeable. All products are manufactured in-house and have been tested under the most extreme weather conditions. Thanks to the use of plastics, the adjustable pedestals provide excellent sound insulation, and they are also available in fire-resistant versions.




son and father
Henri Dejans and Emmanuel Dejans
3rd and 2nd generation



DISCOVER OUR DECKING PEDESTAL CALCULATOR

Figure out everything you need for your
terrace project in minutes.

Explore the app on calculator.solidor.be

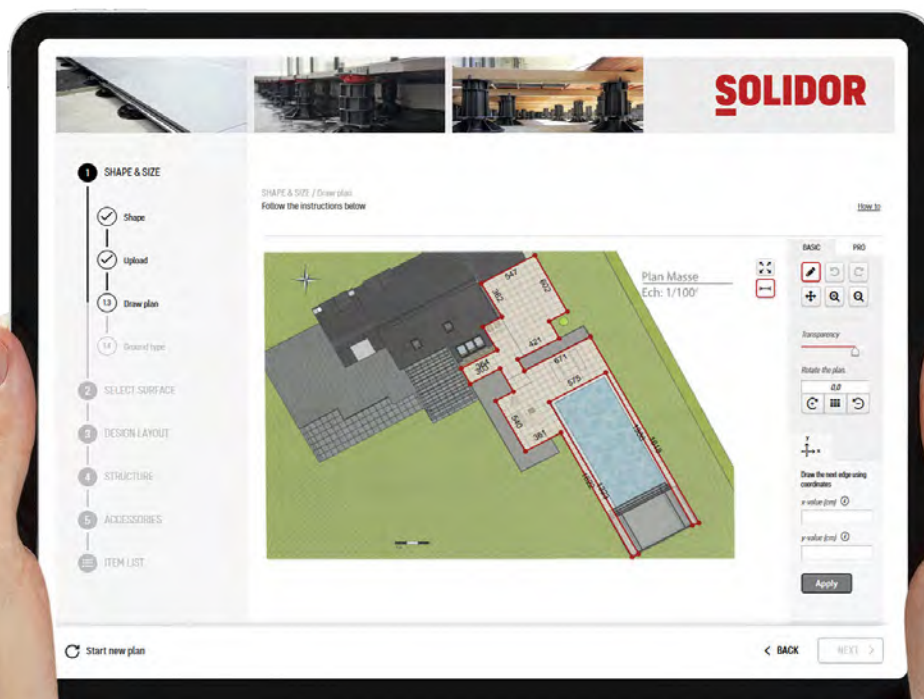

THE PERFECT SOLUTION FOR EVERY TYPE OF TERRACE



TILE





WOOD



GRAVEL ROCK



GRASS MATS

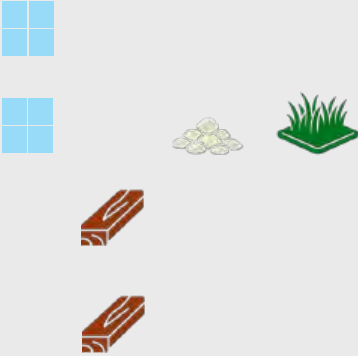	FIXSOL	FIXED TERRACE PEDESTALS WITH A HEIGHT OF 10 MM AND 14 MM	P. 07	DECKING PEDESTALS
	COMFORT	ADJUSTABLE PEDESTALS STARTING FROM 23 MM - 1 M	P. 11	
	LUNISOL	ILLUMINATED TOP PLATE	P. 29	
	FIRESOL	FLAME-RESISTANT PEDESTALS FROM 23 MM TO 220 MM	P. 35	
	STRUCTUSOL	ALUMINUM SUBSTRUCTURE WITH NOISE-REDUCING RUBBER	P. 39	SUBSTRUCTURE SYSTEMS ON PEDESTALS
	UNISOL	STRUCTURAL TILE	P. 51	
	DEQSOL	UNIVERSAL ALUMINUM SUPPORT JOIST WITH VISIBLE SCREWS	P. 55	
	LINUP	ALUMINIUM SUPPORT BEAM WITH CLICK SYSTEM AND INVISIBLE FASTENING	P. 59	
	LINUP	SEAMLESS CLADDING OF WOODEN WALLS, CEILINGS OR FAÇADES	P. 65	FACADE CLADDING, CEILING
	SIDESOL	ALUMINIUM EDGE PROFILE FOR TERRACES	P. 71	FINISHING
	DRAINSOL	DRAINAGE PROFILES AND VENTILATION	P. 75	
	CRIX	LEVELLING SYSTEM FOR INSTALLING TILES INDOORS AND OUTDOORS	P. 79	LEVELLING SYSTEM
	GRAVIERSOL	GRAVEL STABILISATION	P. 89	SUBSTRUCTURE

FIXSOL - FIXED PEDESTALS





TILES



WOOD

The fixed terrace pedestals are the starting point of the SOLIDOR range. These non-adjustable pedestals **are available in two heights (10 mm and 14 mm)** and are made from recycled rubber. Thanks to the integrated fastening hole, the top plate can be firmly anchored into the rubber. Depending on the chosen top plate, the fixed terrace pedestals **are suitable for both wooden and tiled terraces**. They offer a simple, durable and stable solution for any outdoor terrace.



FIXED PEDESTALS

NEW




UP/CI3/4T

ref. 013868 - 50 pcs/bag

- Spacer height: 10 mm
- Removeable upstands

Height: 3 mm
1/8 inch
Joint width: 3 mm
1/8 inch

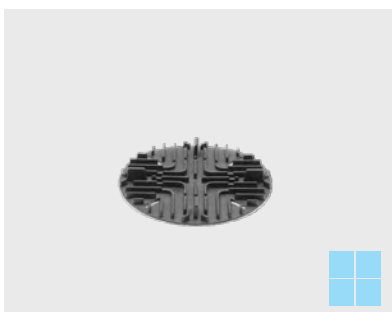

DALSUP

ref. 001666 - 50 pcs/box

- Stackable
- Without rubber

Height: 10 mm
0.39 inch
Joint width: 3 mm
1/8 inch



RC10 + C10

ref. 003280 - 50 pcs/box

- Sound-dampening

Height: 10 mm
0.39 inch



RC10 + CI3/4T

ref. 003237 - 50 pcs/box

- Sound-dampening
- Removeable upstands

Height: 10 mm
0.39 inch
Joint width: 3 mm
1/8 inch




RC10 + CIP+

ref. 004122 - 50 pcs/box

- Sound-dampening
- Fixed pedestal specially designed for inserting the Structusol profile

Height: 10 mm
0.39 inch

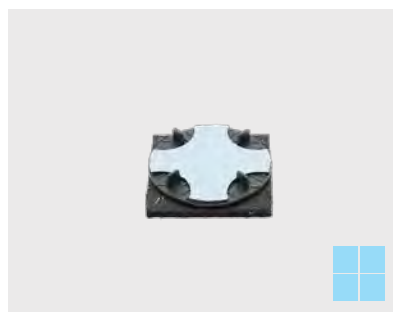

RC10 + STICKSOL

ref. 008770 - 50 pcs/box

- Sound-dampening
- With self-adhesive layer to prevent the tiles from rattling
- Removeable upstands


Height: 10 mm
0.39 inch
Joint width: 3 mm
1/8 inch



TILES



WOOD

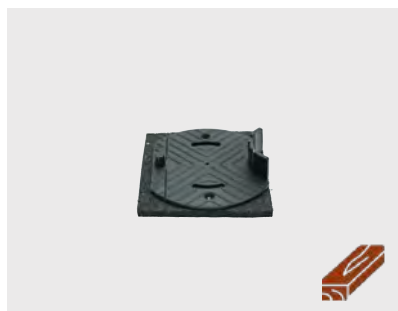

RC10 + CIPV+

ref. 009916 - 50 pcs/box

- Protective layer for roof cladding
- Supports aluminium and wooden beams
- Shock and sound absorbing

Height: 10 mm
0.39 inch



RC14 + CI3/4T

ref. 003238 - 50 pcs/box

- Sound-dampening
- Removeable upstands

Height: 14 mm
0.55 inch
Joint width: 3 mm
1/8 inch




RC14 + CIP+

ref. 004572 - 50 pcs/box

- Sound-dampening
- Fixed pedestal specially designed for inserting the Structusol profile

Height: 14 mm
0.55 inch

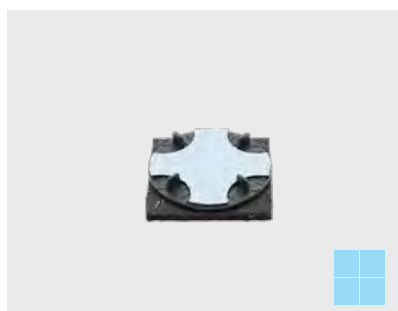

RC14 + STICKSOL

ref. 009260 - 50 pcs/box

- Sound-dampening
- With self-adhesive layer to prevent the tiles from rattling
- Removeable upstands

Height: 14 mm
0.55 inch
Joint width: 3 mm
1/8 inch



RC14 + CIO

ref. 003281 - 50 pcs/box

- Sound-dampening

Height: 14 mm
0.55 inch



RC14 + CIPV+

ref. 009917 - 50 pcs/box

- Protective layer for roof cladding
- Supports aluminium and wooden beams
- Shock and sound absorbing

Height: 14 mm
0.55 inch

COMFORT - DECKING PEDESTALS





TILES



WOOD

A NEW STANDARD

The Comfort range offers the most versatile terrace pedestals for both tiles and wooden decking. These modular pedestals **are adjustable from 23 mm/0.91 inch up to an impressive 1 metre/ 39.37 inch in height**. Thanks to the dedicated components for both applications, this range combines maximum flexibility with a high-quality finish - ideal for projects where stability and aesthetics go hand in hand.



ALL COMFORT TERRACE PEDESTALS ALSO AVAILABLE IN:



IPV

For added damping, the terrace pedestals are provided with a rubber mat. This protective layer is sound and shock absorbing, insulating and provides extra grip.



GV

These decking pedestals are glass-fibre reinforced and so have added bearing force making them perfectly suitable for heavy structures.



FR

These decking pedestals are fire retardant and made of flameretardant material, a property that is often required.

ADJUSTABLE DECKING PEDESTALS



PV 2.3/3.5

ref. 011000 - 50 pcs/bag

Range: 23 – 35 mm
0.91 - 1.38 inch



PV 3.5/5

ref. 008771 - 50 pcs/bag

Range: 35 – 50 mm
1.38 - 1.97 inch



PV 5/8

ref. 008773 - 50 pcs/bag

Range: 50 – 80 mm
1.97 - 3.15 inch



PV 8/11

ref. 008392 - 50 pcs/bag

Range: 80 – 110 mm
3.15 - 4.33 inch



PV 11/14

ref. 008393 - 40 pcs/bag

Range: 110 – 140 mm
4.33 - 5.51 inch



PV 14/17

ref. 008394 - 40 pcs/bag

Range: 140 – 170 mm
5.51 - 6.69 inch

ADJUSTABLE DECKING PEDESTALS WALL VERSION



AK 3.5/5

ref. 008792 - 50 pcs/bag

- The AK pedestals allow to install the tiles perfectly stable against the wall

Range: 35 – 50 mm
1.38 - 1.97 inch



AK 5/8

ref. 008791 - 50 pcs/bag

- The AK pedestals allow to install the tiles perfectly stable against the wall

Range: 50 – 80 mm
1.97 - 3.15 inch




TILES



WOOD



TOP PLATES

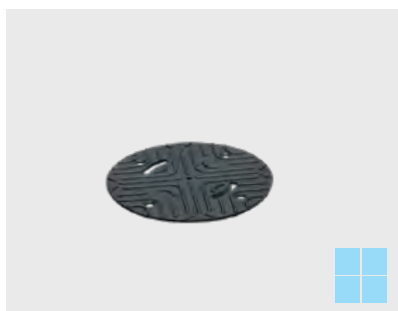

C0

ref. 001660 - 50 pcs/bag

- Flat top plate, without upstands
- Supports tiles larger than 60 by 60 cm
23.62 inch by 23.62 inch
- Is combined with an adjustable pedestal of choice



C2/4T

ref. 003386 - 50 pcs/bag

- Is combined with an adjustable pedestal of choice
- Upstands height: 10 mm
0.39 inch
- Removeable upstands

Joint width: 2 mm
1/13 inch



C3/4T

ref. 001657 - 50 pcs/bag

- Is combined with an adjustable pedestal of choice
- Upstands height: 15 mm
0.59 inch
- Removeable upstands

Joint width: 3 mm
1/8 inch

NEW



C3/2T

ref. 100600 - 50 pcs/bag

- Top plate with two spacers for application along the wall or large-format tiles
- Removeable upstands
- Upstands height: 15 mm
0.59 inch

Joint width: 3 mm
1/8 inch



C6/4T

ref. 009091 - 50 pcs/bag

- Is combined with an adjustable pedestal of choice
- Upstands height: 10 mm
0.39 inch
- Removeable upstands

Joint width: 6 mm
0.24 inch



CPV+

ref. 009197 - 50 pcs/bag

- Supports wooden beams
- Optional fixation along bottom or side
- Is combined with an adjustable pedestal of choice
- Self-centring
- 5 various installation options



TILES




WOOD

SELF-ADHESIVE TOP PLATES (STICKSOL)



CO STICKSOL

ref. 012743 - 50 pcs/bag

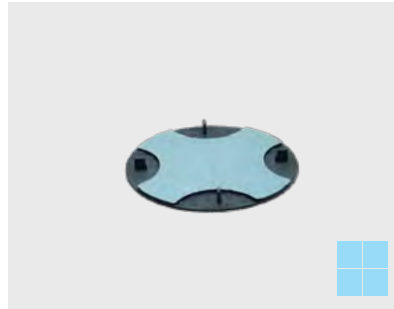

C2/4T STICKSOL

ref. 009815 - 50 pcs/bag

Joint width: 2 mm
1/13 inch

C3/4T STICKSOL

ref. 008659 - 50 pcs/bag

Joint width: 3 mm
1/8 inch**NEW**

C3/2T STICKSOL

ref. 100648 - 50 pcs/bag

Joint width: 3 mm
1/8 inch

C6/4T STICKSOL

ref. 010195 - 50 pcs/bag

Joint width: 6 mm
0.24 inch

- The Sticksol top plates are based on the same top plates as the standard version, but feature a double-sided self-adhesive bitumen insert. This helps prevent tiles from shifting.
- Reduces transmitted noise by 75%
- Provides a solid terrace
- Tested in a Voxdale wind tunnel

TOP PLATES WITH POST-INSTALLATION ADJUSTMENT (TILEKEY)



TILEKEY C4/4T SLOPE

ref. 013055 - 50 pcs/bag

- By means of this top plate, the pedestals can always be adjusted afterwards with the Tilekey
- Top plate with automatic slope corrector
- Corrects slope differences up to a maximum of 5%
- Consists of two parts that need to be slid into each other
- Removeable upstands

Joint width: 4 mm
0.16 inch

Height: 20 mm
0.79 inch




TILEKEY C4/4T FIX

ref. 013054 - 50 pcs/bag

- With this top plate, the supports can always be adjusted afterward using the Tilekey
- Fixed top plate
- Consists of two parts that need to be slid together
- Removeable upstands

Joint width: 4 mm
0.16 inch

height: 20 mm
0.79 inch

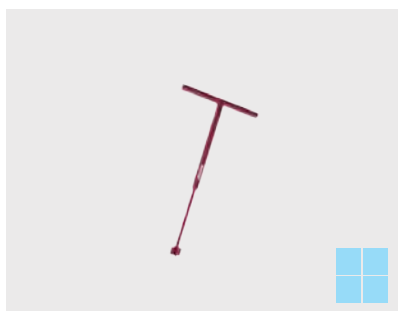

TILEKEY

ref. 012904 -per piece


- Used to adjust the pedestals with the Tilekey top plate after installation



TILES



SLOPE CORRECTOR

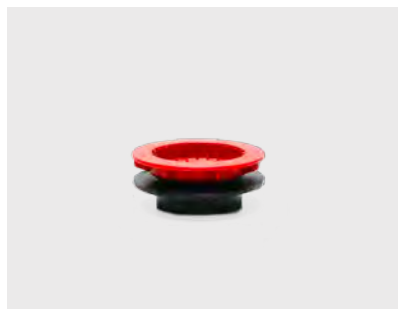


HA5

ref. 009560 - 50 pcs/bag

- Automatic slope corrector
- Improves slope differences up to max. 5%
- Can be combined with various accessories
- HA5 is mounted on the PV

Height: 20 mm
0.79 inch

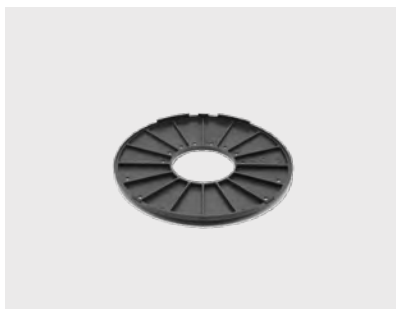

HS2

ref. 003324 - 100 pcs/box

- Fixed slope corrector
- Improves slope differences by 2%
- Stackable up to 8 %
- Is mounted under the terrace pedestal



Installation video:



EXTENSION PIECES



F30

ref. 008399 - 50 pcs/bag

- Increases the range of a pedestal by 30 mm/ 1.18 inch
- Stackable



AF100

ref. 003991 - 100 pcs/box

- Increases the range of a terrace pedestal by 100 mm/ 3.94 inch
- Can be screwed together
- Threaded

Compatible with each other




TILES



WOOD

UNDER-PEDESTAL ACCESSORIES

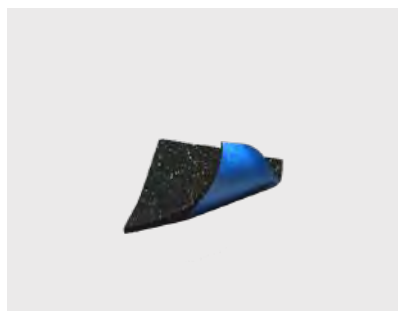


PROTECTIVE RUBBER SMALL + PE FILM

ref. 011668 - 100 pcs/box

- Sound-absorbing, cushioning and water-permeable
- The PE film under the protective rubber is best used when installing a terrace on adjustable pedestals placed on a PVC roofing membrane, to prevent damage to your roofing

Dimension: 96 x 96 mm
3.78 x 3.78 inch
Thickness: 6 mm
0.24 inch

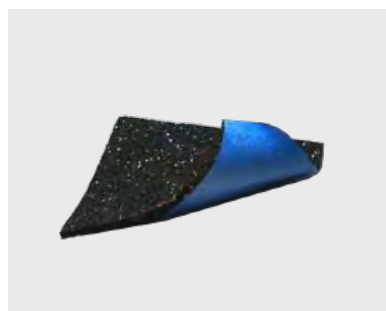

PROTECTIVE RUBBER LARGE + PE FILM

ref. 011667 - 100 pcs/box

- Sound-absorbing, cushioning and water-permeable
- The PE film under the protective rubber is best used when installing a terrace on adjustable pedestals placed on a PVC roofing membrane, to prevent damage to your roofing

Dimension: 210 x 210 mm
8.27 x 8.27 inch
Thickness: 6 mm
0.24 inch



PROTECTIVE RUBBER SMALL

3 mm: ref. 009168 - 150 pcs/box
5 mm: ref. 009172 - 100 pcs/box
10 mm: ref. 009173 - 50 pcs/box

- Sound-absorbing, cushioning and water-permeable

Dimension: 96 x 96 mm
3.78 x 3.78 inch
Thickness: 3, 5 or 10 mm
0.11, 0.19 or 0.39 inch



PROTECTIVE RUBBER LARGE

3 mm: ref. 009171 - 200 pcs/box
5 mm: ref. 009169 - 100 pcs/box
10 mm: ref. 009170 - 50 pcs/box

- Sound-absorbing, cushioning and water-permeable

Dimension: 210 x 210 mm
8.27 x 8.27 inch
Thickness: 3, 5 or 10 mm
0.11, 0.19 or 0.39 inch



Installation video:



Installation video:



ACCESSORIES FOR DECKING PEDESTALS – TILES

NEW




CML

ref. 100770

- Designed for wall-side installation; pairs with any terrace support from our range
- Delivers a clean, finished edge
- Suitable for 20 mm/0.79 inch tiles
- Includes an integrated 10 mm/0.39 inch groove with holder for LED strip

Height: 140 mm
5.51 inch

Joint width: 10 mm or 20 mm
0.39 inch or 0.79 inch

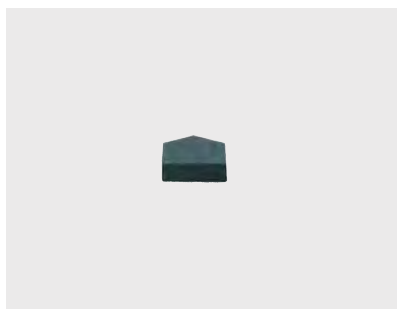

WALL FINISH

4 mm: ref. 008600 - 300 pcs/box
6 mm: ref. 008601 - 200 pcs/box
10 mm: ref. 008507 - 100 pcs/box

- Joint between tile and wall
- Shock absorbing
- Tile + facade protection
- Consistent joint width
- Is glued to the side of the tile

Joint width: 4, 6 or 10 mm
5/32, 0.24 or 0.39 inch



Installation video:



EDGE FINISH

ref. 007071 - 25 pcs/box
ref. 007072 - 25 pcs/box

- For placement at the end of a terrace with open edge
- Provides a beautiful edge finish
- Suitable for tiles with a thickness of 20 mm
0.79 inch



Installation video:





TILES

* First, a wind load calculation must be carried out by SOLIDOR.




EPDM SOLID RUBBER ADAPTOR

1 mm: ref. 008155 - 100 pcs/pack
2 mm: ref. 008156 - 100 pcs/pack
3 mm: ref. 008733 - 50 pcs/pack

- Sound-absorbing, cushioning and waterresistant protective layer
- Tears apart easily to accommodate surface irregularities

Thickness: 1, 2 or 3 mm
1/32, 1/13 or 1/8 inch

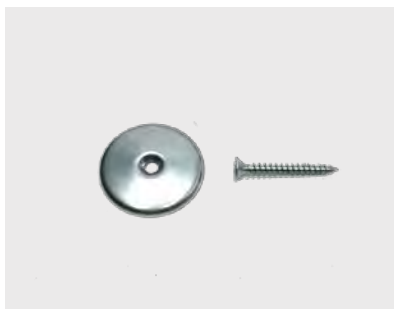

TILELOCK VISIBLE*

ref. 011462 - 100 pcs/box

- Reduces the risk of tiles being blown away due to strong gusts of wind
- Is installed on the corners of the tile
- The effectiveness of the Tilelock Visible is enhanced when combined with a Sticksol self-adhesive top plate
- Secured directly into the pedestal's top plate using the provided screw
- The ring and screw are made of stainless steel




TILELOCK INVISIBLE*

ref. 012661 - 100 pcs/box

- Must be fixed in the designated grooves of the tile
- Reduces the risk of tiles being lifted by strong wind gusts
- Secured directly into the pedestal's top plate using the provided screw
- The ring and screw are made of stainless steel



ACCESSORIES FOR DECKING PEDESTALS – WOOD

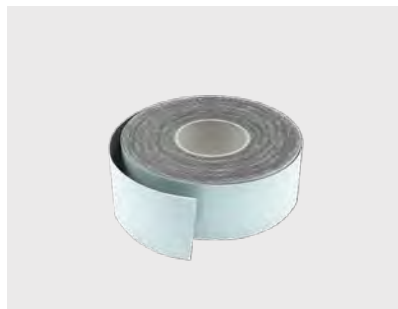

WATERPROOF STRIP

20.000 x 50 mm: ref. 010604 - 32 pcs/box
20.000 x 80 mm: ref. 005703 - 24 pcs/box

- Sound-absorbing, cushioning and water resistant protective layer
- Prevents decay of underlying support beams
- EPDM closed-cell rubber
- Adhesive

Dimensions: 20.000 x 50 mm
787.40 x 1.97 inch
20.000 x 80 mm
787.40 x 3.15 inch

Thickness: 1,4 mm
0.055 inch



FACADE SEALING TAPE

20.000 x 100mm: ref. 011764 - 16 pcs/box
25.000 x 60 mm: ref. 100262 - 24 pcs/box

- Used to create a watertight seal
- Protection against rising damp
- Non-adhesive
- EPDM closed-cell rubber

Dimensions: 20.000 x 100 mm
787,40 x 3,94 inch
25.000 x 60 mm
984,25 x 2,36 inch

Thickness: 0,75 mm
0,03 inch




SPACER

4 mm: ref. 008453 - 200 pcs/box
7 mm: ref. 009262 - 200 pcs/box


- Prevents contact of wooden planks and underlying support beams
- Prevents flooding
- Provides a smooth joint
- Extends the life span of your terrace

Joint width: 4 and 7 mm
0.16 and 0.28 inch

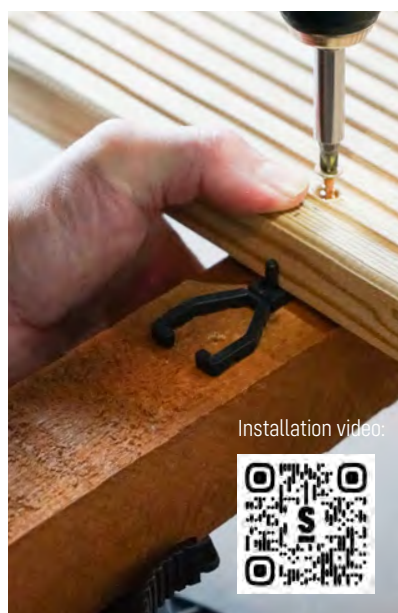



WOOD

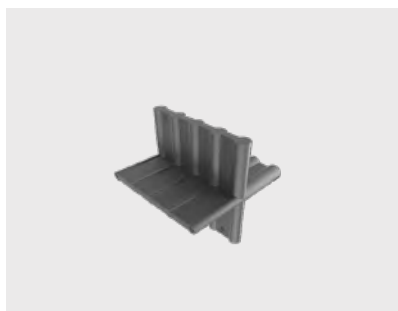

MULTI SPACER

ref. 013247 - 10 pcs/box

- Provides a smooth joint

Joint width: 4, 5, 6 and 7 mm
0.157, 0.197, 0.236 and 0.276 inch



SOLASTICK

ref. 001696 - 100 pcs/box

- No visible screws on the terrace surface
- Prevents flooding
- Extends the life span of your terrace
- Reinforced with fiberglass

Height: 10 mm
0.39 inch



SOLASWITCH


ref. 011014 - 8 pcs/box

- This system allows you to easily remove the decking board without having to dismantle the entire terrace
- It acts as a lock that needs to be turned to remove the wooden plank
- Not visible on the terrace surface


Height: 8 mm
0.315 inch



Installation video:

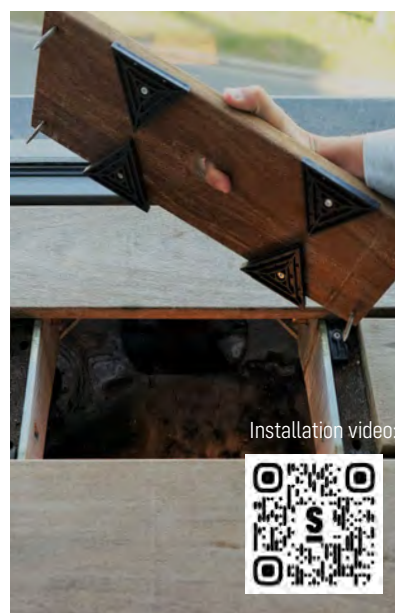


Installation video:



GRAPHIC REPRESENTATION OF HEIGHTS

F30

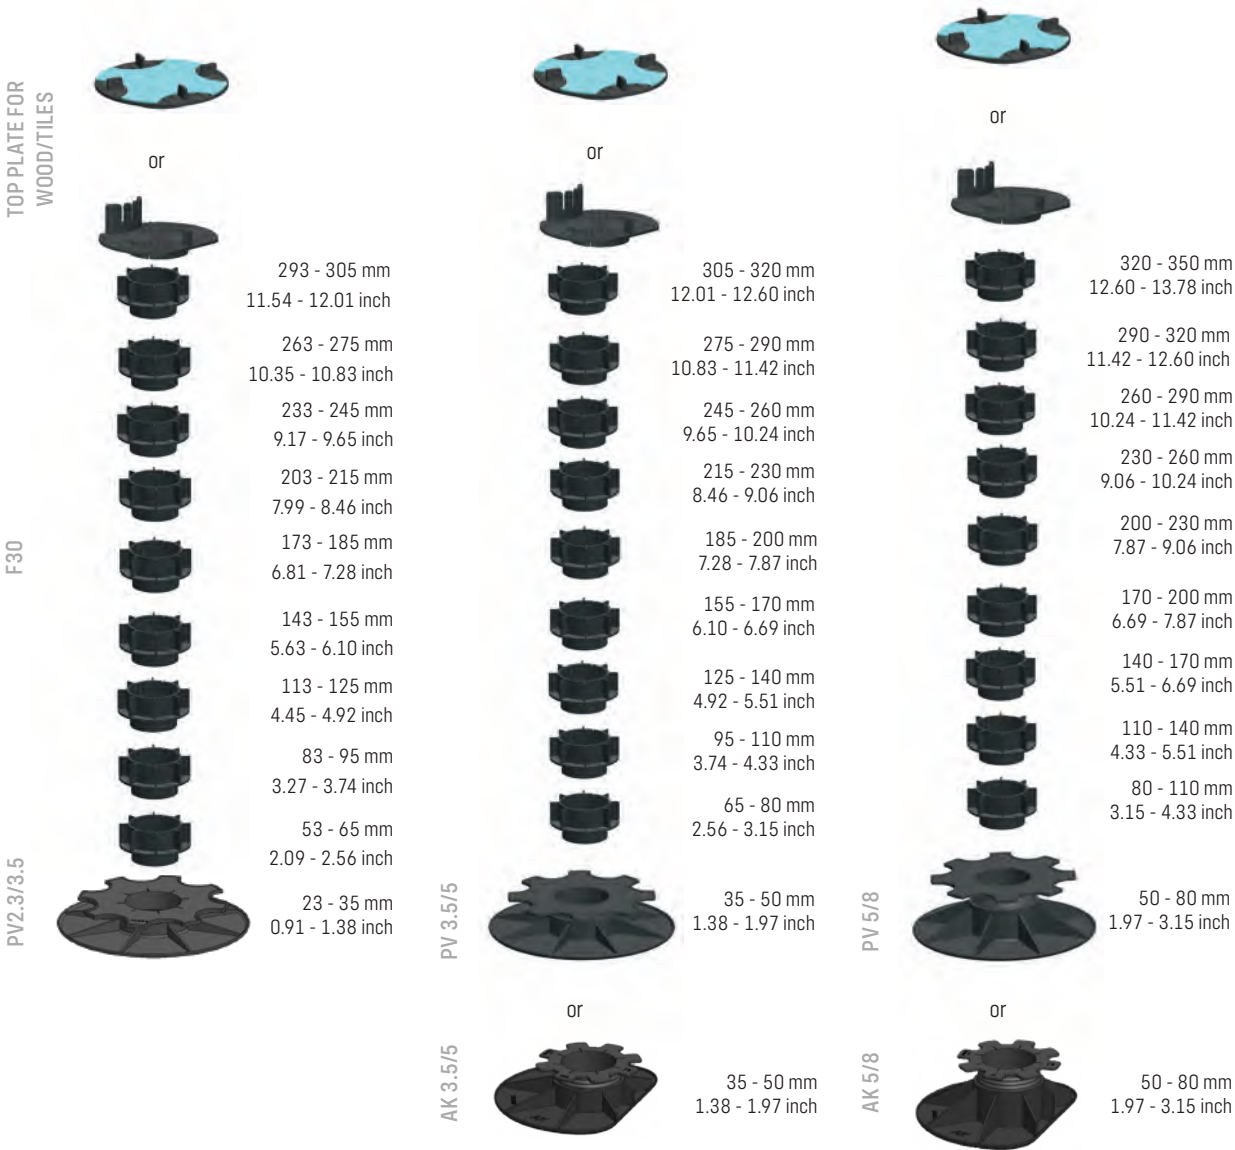



TILES



WOOD

Note: For greater construction heights, it is recommended to install additional decking pedestals.

PV 8/11



or

350 - 380 mm
13.78 - 14.96 inch

320 - 350 mm
12.60 - 13.78 inch

290 - 320 mm
11.42 - 12.60 inch

260 - 290 mm
10.24 - 11.42 inch

230 - 260 mm
9.06 - 10.24 inch

200 - 230 mm
7.87 - 9.06 inch

170 - 200 mm
6.69 - 7.87 inch

140 - 170 mm
5.51 - 6.69 inch

110 - 140 mm
4.33 - 5.51 inch

PV 11/14



or

380 - 410 mm
14.96 - 16.14 inch

350 - 380 mm
13.78 - 14.96 inch

320 - 350 mm
12.60 - 13.78 inch

290 - 320 mm
11.42 - 12.60 inch

260 - 290 mm
10.24 - 11.42 inch

230 - 260 mm
9.06 - 10.24 inch

200 - 230 mm
7.87 - 9.06 inch

170 - 200 mm
6.69 - 7.87 inch

140 - 170 mm
5.51 - 6.69 inch

PV 14/17



or

410 - 440 mm
16.14 - 17.48 inch

380 - 410 mm
14.96 - 16.14 inch

350 - 380 mm
13.78 - 14.96 inch

320 - 350 mm
12.60 - 13.78 inch

290 - 320 mm
11.42 - 12.60 inch

260 - 290 mm
10.24 - 11.42 inch


230 - 260 mm
9.06 - 10.24 inch

200 - 230 mm
7.87 - 9.06 inch

170 - 200 mm
6.69 - 7.87 inch

140 - 170 mm
5.51 - 6.69 inch

GRAPHIC REPRESENTATION OF HEIGHTS

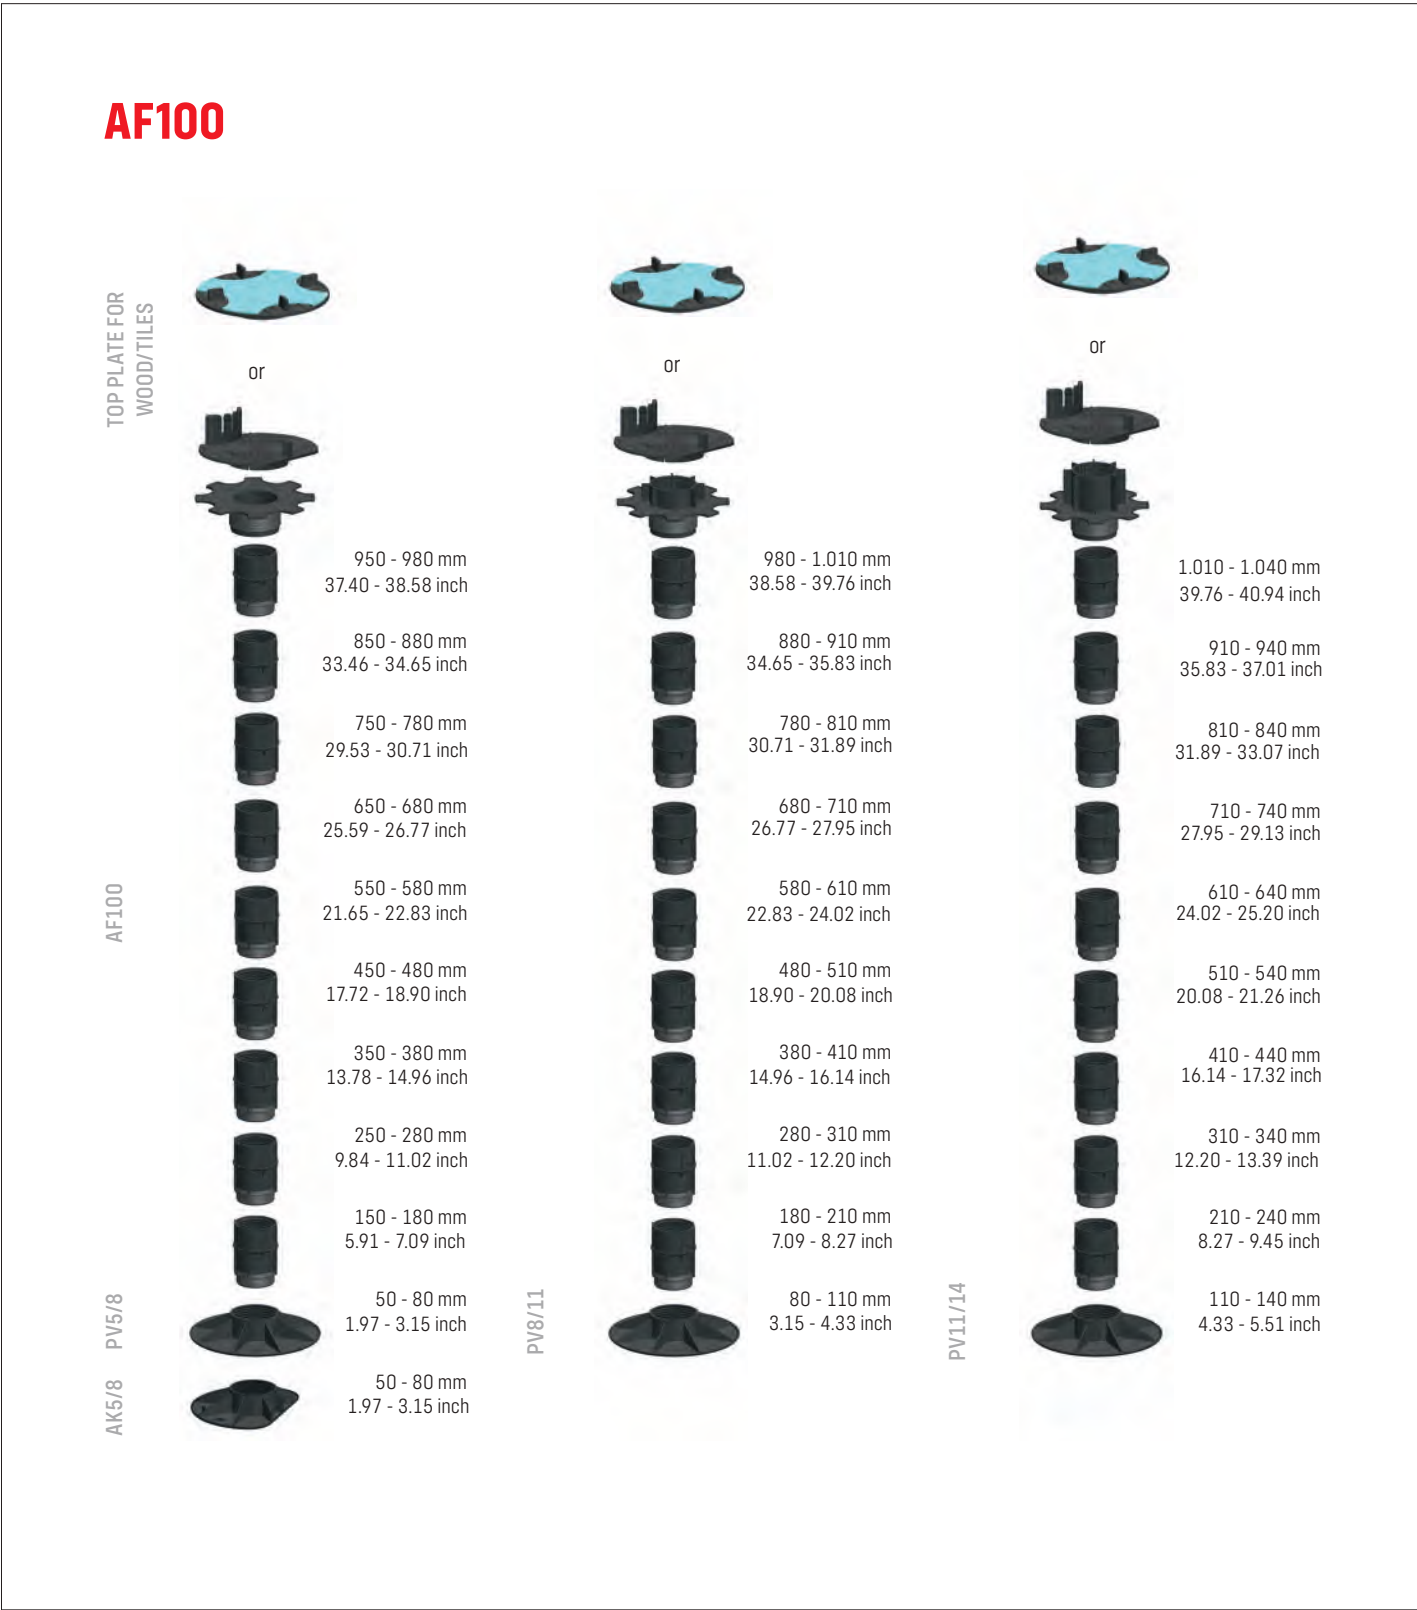



TILES



WOOD

Note: For greater construction heights, it is recommended to install additional decking pedestals.



or



1.010 - 1.070 mm
39.76 - 42.13 inch

940 - 970 mm
37.01 - 38.19 inch

840 - 870 mm
33.07 - 34.25 inch

740 - 770 mm
29.13 - 30.31 inch

640 - 670 mm
25.20 - 26.38 inch

540 - 570 mm
21.26 - 22.44 inch

440 - 470 mm
17.32 - 18.50 inch

340 - 370 mm
13.39 - 14.57 inch

240 - 270 mm
9.45 - 10.63 inch

140 - 170 mm
5.51 - 6.69 inch

PV14/17



LUNIS[•]L - LUMINOUS TOP PLATE FOR TILES





TILES

LIGHT UP YOUR TERRACE!

LUNISOL is the illuminated top plate that fits on SOLIDOR Comfort terrace pedestals. The diffused light subtly shines through the tile joints, creating a warm, architectural glow. Quick to install, water-resistant, and app-controlled. Developed in Belgium, made for international use.

Advantages:

- Perfectly compatible with Comfort terrace pedestals
- Energy-efficient LED technology
- Designed in Belgium, West Flanders
- IP67 protection rating: *Completely dustproof and protected against temporary water immersion
- Fast, easy and waterproof installation
- Choose from multiple colors (adjustable via the app)
- Smart control via a free application

Website page:



World first in terrace pedestals: an illuminated top plate.



TOP PLATE



LUNISOL X

ref. L100720 - per piece

Joint width: 3 mm/ 1/8 inch
Diameter: 123 mm/ 4.84 inch
Colour: transparent
Spacer height: 20 mm/ 0.79 inch
Light source: LED
Inclusif: Protective rubber Lunisol

TRANSFO

ref. L100728 - per piece

When purchasing a Lunisol X or Lunisol L, a transformer must also be purchased. Up to 9 connections can be made on this transformer. The height of this transformer is 35 mm.

WALL VERSION

NEW



CML

ref. 100770

- Designed for wall-side installation; pairs with any terrace support from our range
- Delivers a clean, finished edge
- Suitable for 20 mm/0.79 inch tiles
- Includes an integrated 10 mm/0.39 inch groove with holder for LED strip

Height: 140 mm
5.51 inch

Joint width: 10 mm or 20 mm
0.39 inch or 0.79 inch

NEW



LUNISOL L

1 m - ref. L100721 - per piece
2 m - ref. L100722 - per piece
3 m - ref. L100723 - per piece
4 m - ref. L100724 - per piece
5 m - ref. L100725 - per piece
Made to measure - ref. L100726 - per piece

- Installed in the joint along the terrace edges
- To be installed before mounting in the Lunisol L top plate, placed on terrace supports

Light source: LED
Light colour: warm white



TILES

INSTALLATION STEP-BY-STEP GUIDE



STEP 1

Place a protective rubber Lunisol underneath the pedestal.



STEP 2

The cable is placed in the designated opening of the Lunisol protective rubber.



STEP 3

Place the top plate on the terrace pedestal.



STEP 4

Connect the cable and plug it into the socket.




STEP 5

Connect with the app.



STEP 6

Select your desired colour and ambiance via your smartphone.

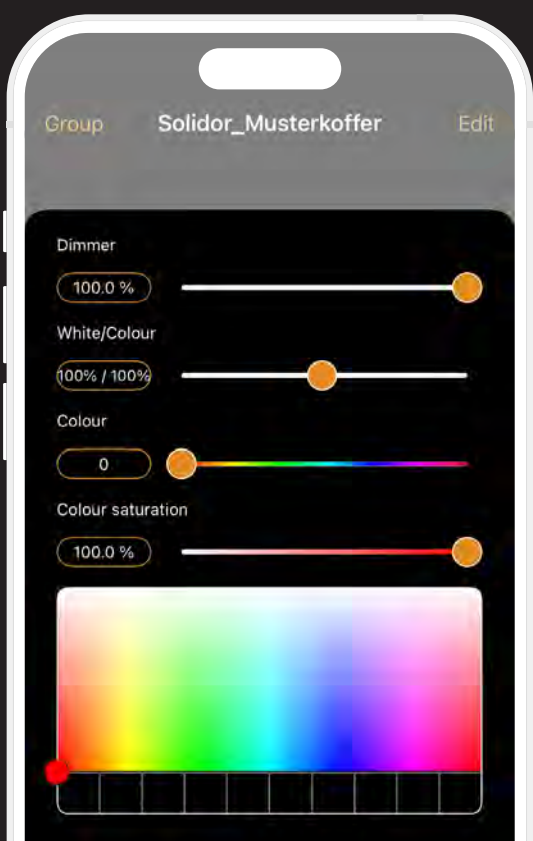

SMART CONTROL VIA THE APP


- Dimmable 0-100%
- White to warm + colour accents
- Grouping by zone/terrace







FIRESOL - FIREPROOF PEDESTALS

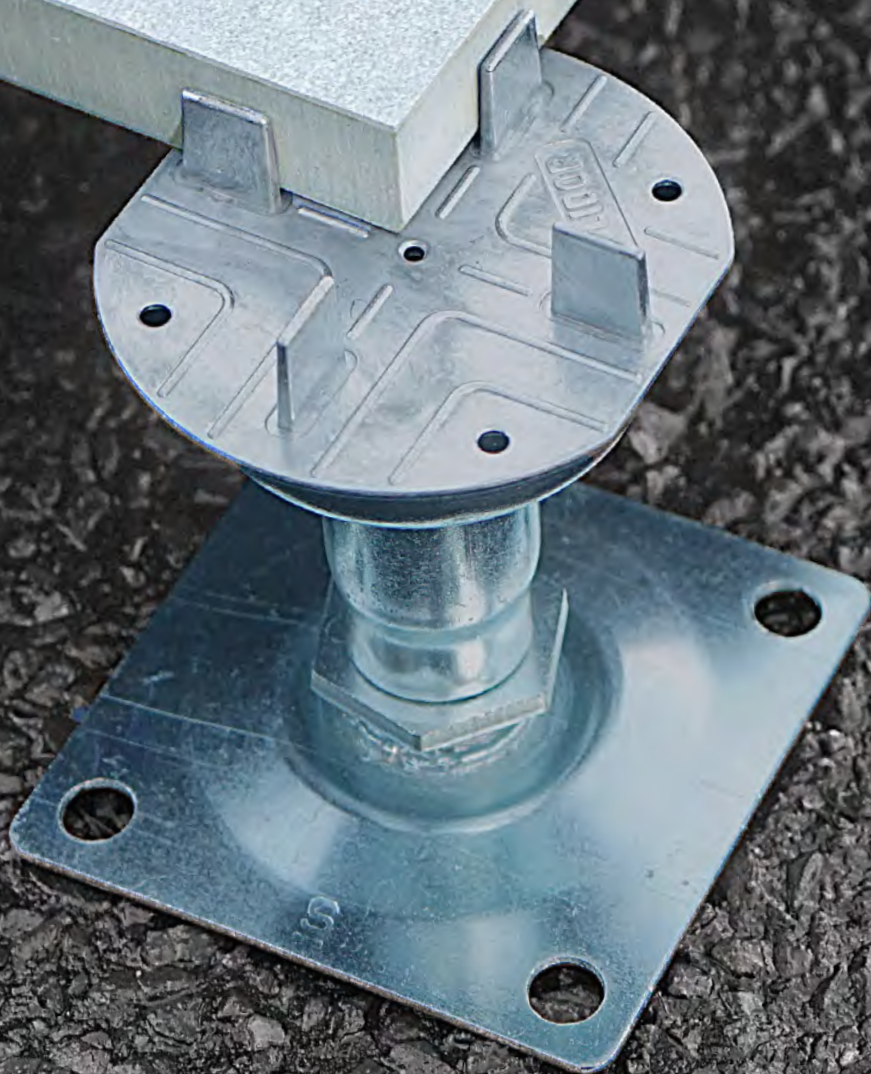

SI



TILES




WOOD

FIREPROOF TERRACE PEDESTALS FOR DECKING OR TILES

SOLIDOR, a pioneer in terrace pedestals, offers in addition to the Comfort range, but also fireproof pedestals under the Firesol range. The Firesol pedestals consist of modular adjustable pedestals, **starting with a minimum height of 25 mm/1 inch and can go up to 220mm/8,66 inch.**

Advantages:

- Fire-free, Euroclass A1 compliant
- For new construction and renovation projects
- Each has a blocking ring (level controller)
- Modular
- High bearing capacity: 3,000 kg/m²

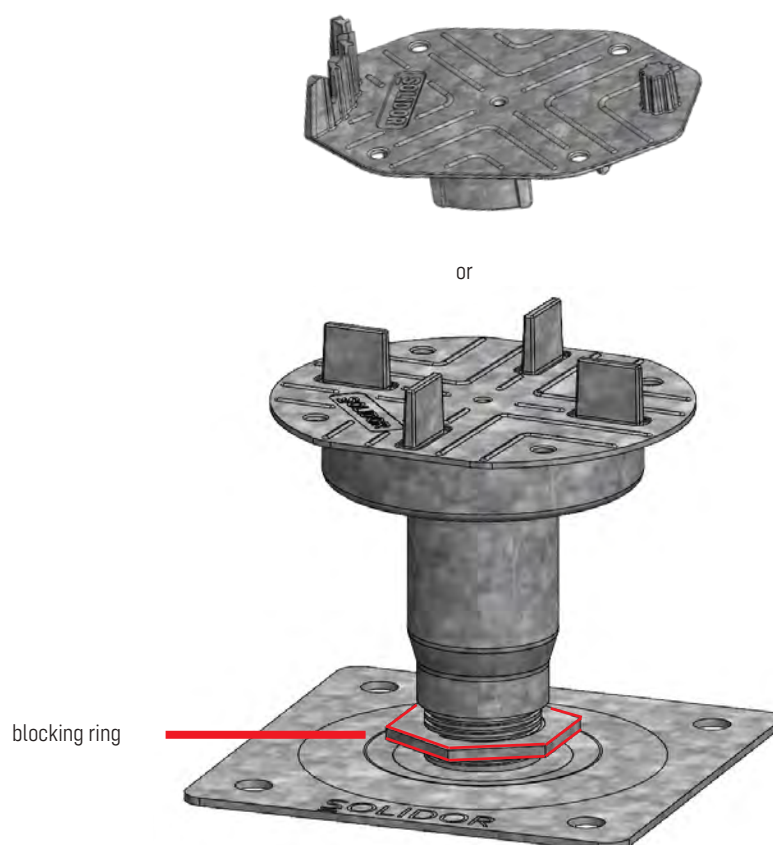

FIREPROOF ADJUSTABLE PEDESTALS



FS 2.5/3.5

ref. 012290 - 40 pcs/box

Range: 25 – 35 mm
0.98 - 1.38 inch



FS 3.5/4.5

ref. 011095 - 40 pcs/box

Range: 35 – 45 mm
1.38 - 1.77 inch



FS 4.5/6

ref. 011096 - 40 pcs/box

Range: 45 – 60 mm
1.77 - 2.36 inch



FS 6/8

ref. 010240 - 40 pcs/box

Range: 60 – 80 mm
2.36 - 3.15 inch



FS 7/10

ref. 010241 - 40 pcs/box

Bereik: 70 – 110 mm
2.76 - 4.33 inch



FS 9/14

ref. 010242 - 40 pcs/box

Bereik: 90 – 140 mm
3.54 - 5.51 inch



FS 13/22

ref. 010243 - 40 pcs/box

Bereik: 130 – 220 mm
5.12 - 8.66 inch




TILES



WOOD

TOP PLATE

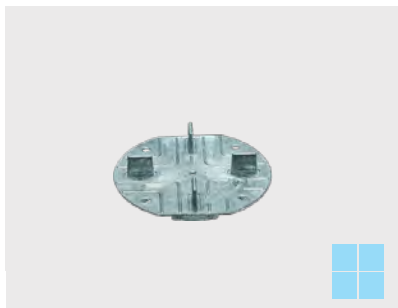

FS C3/4T

ref. 010589 - 40 pcs/box

- Can be combined with an FS adjustable terrace pedestal of your choice

Joint width: 3 mm
1/8 inch
Spacer height: 13 mm
0.51 inch




FS CPV+

ref. 012109 - 40 pcs/box

- Supports wooden beams
- Optional fixation along bottom or side
- Can be combined with an FS adjustable terrace pedestal of your choice
- Self-centring

**SOLIDOR'S FIRE-
PROOF PEDESTALS
WITH A HIGH
BEARING CAPACITY**

FIXED PEDESTAL

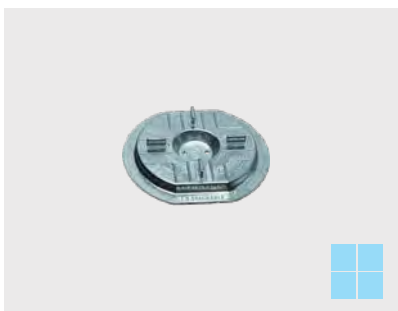

FS DALSUP

ref. 012556 - 40 pcs/box

- Stackable

Height: 10 mm
0.39 inch
Joint width: 3 mm
1/8 inch



STRUCTUSOL - ALUMINIUM SUPPORT SYSTEM

SI



TILES

INNOVATION, STRENGTH AND STABILITY IN ONE SYSTEM

You already know the strength of our SOLIDOR terrace pedestals. The Structusol system is the aluminium support structure for tile installations and the perfect complement to them. The result is an extremely stable and durable substructure.

Use the different connectors for a smooth installation and the practical joint pieces for efficient water management. Stability is guaranteed thanks to the blind rivets.

- Unlimited in terms of tile sizes and installation patterns
- For new construction and renovation projects
- Eliminates slopes and unevenness
- Fast and comfortable placement

Compatible with all terrace pedestals from the SOLIDOR range.

Integrated thermoplastic rubbers



ALUMINIUM SUPPORT SYSTEM




STRUCTUSOL

aluminium: ref. 008428 - per piece
black powder-coated aluminium: ref. 011404 - per piece

- 2,4 m/ 94.49 inch long
- Made of aluminium with the lowest CO² emissions on the market
- Also available in black powder-coated
- 5 adjustable pedestals/ profile

Thickness: 16 mm
0.63 inch

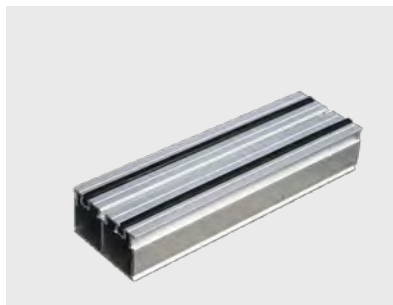

STRUCTUSOL XL

aluminium: ref. 012107 - per piece
black powder-coated aluminium: ref. 012108 - per piece

- 2,4m/ 94.49 inch long
- Made of aluminium with the lowest CO² emissions on the market
- Also available in black powder-coated
- 3 adjustable pedestals/ profile

Thickness: 45 mm
1.77 inch

TOP PLATE



C-CLIP

ref. 009777 - 50 pcs/bag

- Top plate specially designed for inserting the Structusol Comfort profile
- Two holes on outer sides for cables

Height: 10 mm
0.39 inch



TILES


ACCESSORY



INOX L

ref. 010239 - 50 Inox L + 200 screws/box

- L-shaped
- Made of stainless steel
- For finishing open sides
- Accessory for creating stair steps

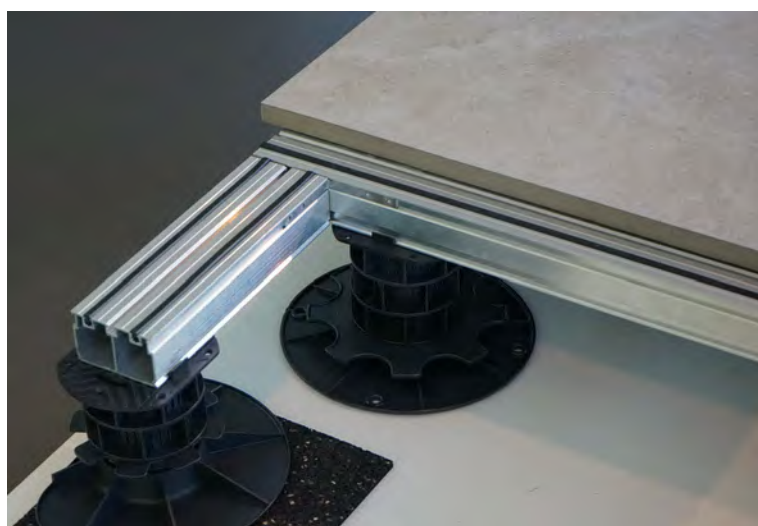

LATERAL TERRACE CONNECTOR

ref. 100427 - 20 pcs/box

- L-shaped
- Made of stainless steel
- For laterally connecting different profiles

ACCESSORY



STRUCTUSOL EDGE FINISH


ref. 010860 - 25 pcs/box

ref. 007071 - 25 pcs/box

- Finishing of terrace with tiles laid parallel with aluminum support system.



Installation video:





TILES

ACCESSORY



UPWIND PREVENTION*

ref. 012827 - 50 pcs/box

- Specially designed for the Structusol range
- Must be installed in the grooves of the tile
- Reduces the risk of tiles being lifted by strong gusts of wind
- Is screwed directly into the aluminum support system using the supplied screw

Joint width: 5 mm
4/25 inch

*A wind load calculation must first be performed by SOLIDOR.



ACCESSORIES

JOINT PIECES

Joint piece **C3L**

ref. 008149 - 50 pcs/box



Joint piece with cross head (break to size) **C2X** - joint width 2 mm/ 1/13 inch **C3X** - joint width 3 mm/ 1/8 inch **C6X** - joint width 6 mm/ 1/4 inch

C2X: ref. 010407 - 50 pcs/box

C3X: ref. 008480 - 50 pcs/box

C6X: ref. 010295 - 50 pcs/box



Joint piece stretcher bond **C3T**

ref. 009457 - 50 pcs/box



CONNECTORS

Frontal connector **VF**

ref. 008466 - 50 pcs/box



Lateral connector **VL**

ref. 008429 - 50 pcs/box



FRONTAL AND LATERAL FINISH

Frontal wall finish **KF**

ref. 008531 - 50 pcs/box



Lateral wall finish **KL**

ref. 008533 - 50 pcs/box



TILES

AWARD WINNING SYSTEM

- Sageret élu BTP (FR)
- Designregio Kortrijk (BE)

SUPPORT SYSTEMS ON PEDESTALS
STRUCTUSOL

QUICK INSTALLATION WITH EXCELLENT LEVELING

STEP 1

Place the terrace pedestals after determining the direction of the Structusol support structures depending on the laying pattern.

STEP 2

Saw the aluminium supporting structures to size and place them on the terrace pedestals by means of the wall and connecting pieces.

STEP 3

Place the joint pieces and the tiles.
Repeat these steps.

Installation video:





TILES




* Fixing the joint pieces with a blind rivet is recommended for optimal stability.







TILES

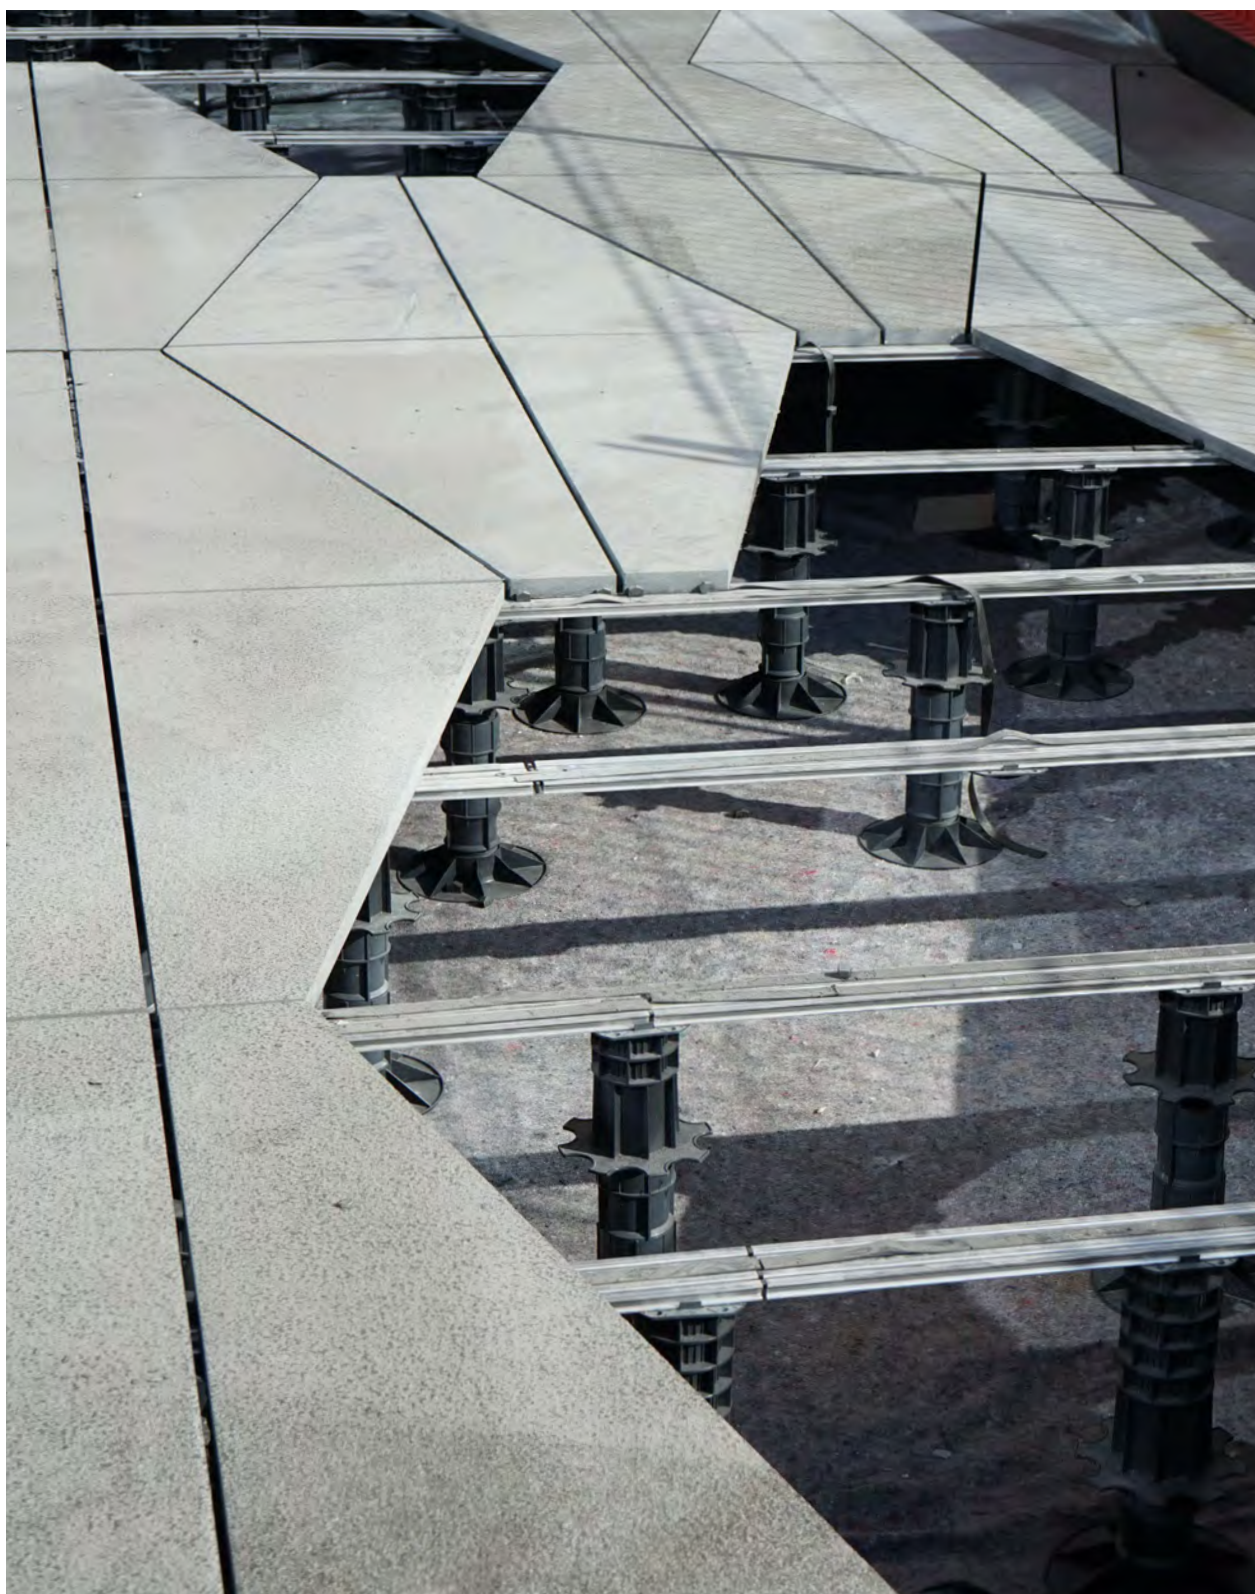

SUPPORT SYSTEMS ON PEDESTALS
STRUCUTSOL



UNISOL - STRUCTURAL TILE





GRAVEL ROCK



GRASS MATS



TILES

STRONG AND FLEXIBLE SUPPORT STRUCTURE FOR TERRACES

The UNISOL system is an innovative support structure that allows you to build terraces quickly and safely. The range consists of a **structural tile (50 x 50 cm, 4 cm thick/ 19.69 x 19.69 inch, 1.57 inch thick)** with **matching top plates that rest on adjustable terrace pedestals**. Thanks to its smart design, you can choose from various finishes such as ceramic tiles, natural stone, gravel, or grass mats.

Key features of the UNISOL structural tile:

- Quick and easy installation
- Suitable for various finishes (ceramic tiles, natural stone, gravel, or grass mats)
- Flexible in height and design
- Durable and low-maintenance



STRUCTURAL TILE - UNISOL



UNISOL TILE

ref. 013866 - per piece

- Tiles, stones, or grass mats can be easily installed on the structural tile
- Each tile requires 4 adjustable terrace pedestals for support.

Height: 4 cm

1.57 inch

Dimensions: 50 x 50 cm

19.69 x 19.69 inch



ACCESSORIES FOR UNDERNEATH THE UNISOL TILE



UN/SLOPE

ref. 013867 - 50 pcs/bag


- The adjustable terrace pedestal with this top plate can always be adjusted afterwards using the Tilekey key
- Top plate with automatic slope corrector
- Corrects height differences of up to 5%



UN/FIX

ref. 013877 - 50 pcs/bag

- The adjustable terrace pedestal with this top plate can always be adjusted afterwards using the Tilekey key
- Fixed top plate

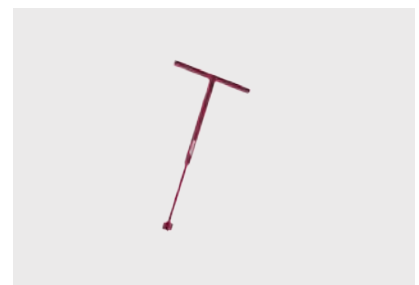

TILEKEY

ref. 012904 - per piece

- It is used to adjust the pedestals with the Unisol accessories underneath the tile after installation.



GRAVEL ROCK



GRASS MATS



TILES

ACCESSORIES FOR UP THE STRUCTURAL TILE

NEW



UP/CI3/4T

ref. 013868 - 50 pcs/bags

- Need to be placed up the Unisol tile
- Height of spacers: 10 mm/ 0.39 inch
- Option to break off the four upstands



UP/GLUE

ref. 013869 - 50 pcs/bags


- Need to be placed up the Unisol tile
- Provide notches in the top plate for the adhesive to bond



UP/BRACKET

ref. 013870 - 20 pcs/bags

- Can be fixed by screw
- Is used to hold tiles in place

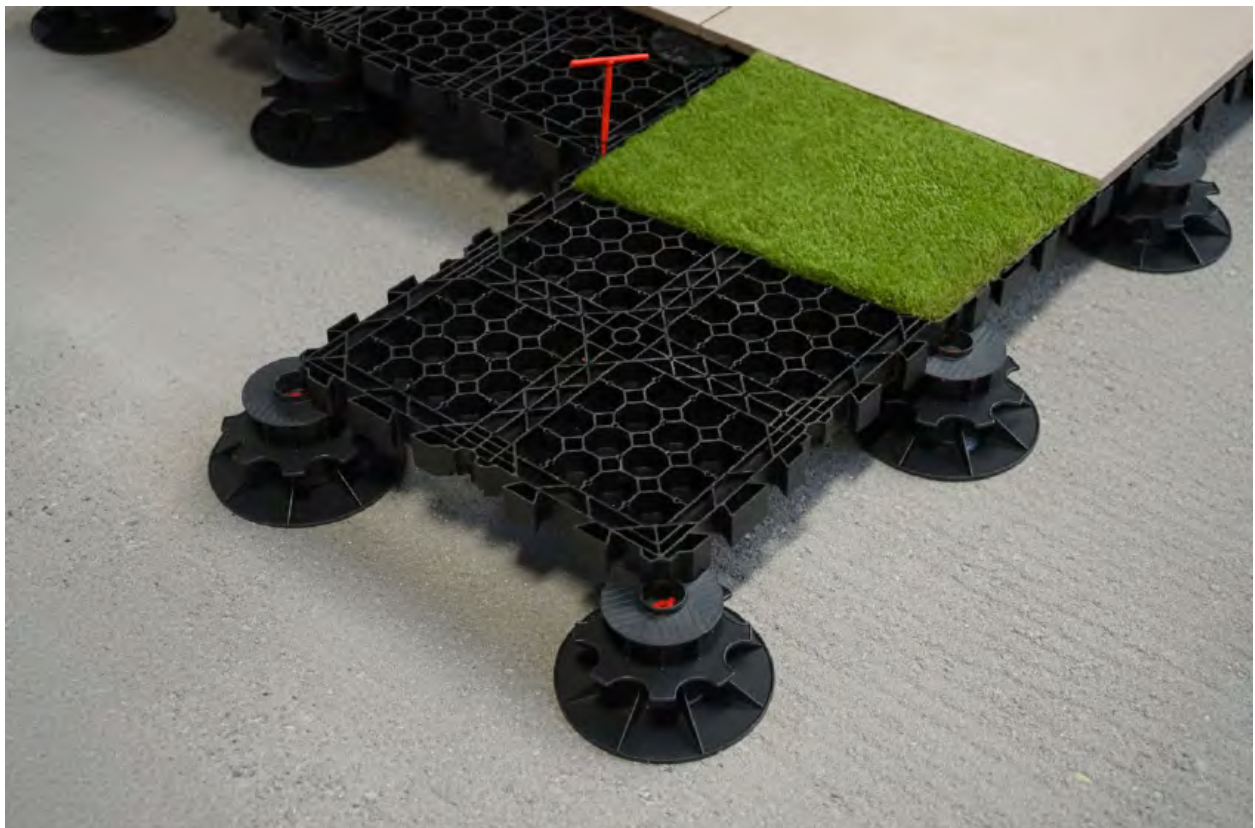

DEQSOL - ALUMINIUM SUPPORT SYSTEM





WOOD

The Deqsol aluminium support system **is designed for the installation of wooden or composite terraces**. It is developed to prevent the rotting of underlying joists and to extend the lifespan of your deck.

Compatible with all decking pedestals from the SOLIDOR range.

Additional benefits:

- Rot-resistant
- No deformation of the aluminum system
- Extra stability
- Installation uses C-Clip and C2-Clip top plates, saving time as there is no need to screw into the aluminum profiles
- Electrical cables and utilities can be easily placed underneath the terrace
- Enhanced air circulation between wooden or composite terraces through spacers and accessories
- The system features 3 grooves for the attachment of clips using self-tapping screws
- More than 80% of the aluminum in our Deqsol system comes from recycled aluminum

30 mm
1.18 inch



Installation video:



SYSTEM



PROFILE


ref. 010599 - per piece

- Made from aluminum with the lowest CO² emissions on the market

Height: 30 mm
1.18 inch

Length: 2,3 m
90.55 inch

TOP PLATE

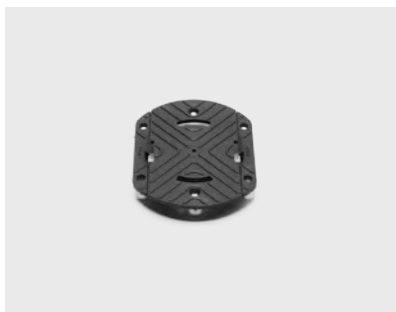

C-CLIP

ref. 009777 - 50 pcs/bag

- Comfort top plate designed to fit the Deqsol profile
- Two holes on the outer sides for cable ties to secure cables to the top plate

Height: 10 mm
0.39 inch




WOOD


ACCESSORIES

CONNECTORS

Frontal
connector
FC
ref. 010699 - 25 pcs/box




Lateral
connector
LC
ref. 010698 - 25 pcs/box



Lateral
connector
inox L
LC inox L
ref. 010999 - 25 pcs/box



No screws visible
on the surface of
the terrace
Solastick
ref. 001696 - 100 pcs/box



LINUP - ALUMINIUM SUPPORT SYSTEM FOR WOODEN TERRACES





WOOD

LINUP: A CLICK & SLIDE SYSTEM FOR THE CONCEALED FASTENING OF WOODEN DECKING

The SOLIDOR Linup terrace system consists of a **30 mm/1.18 inch high aluminium profile and matching clips**. This system allows you to easily install solid wooden decking on SOLIDOR terrace pedestals.

The clips create the perfect joint, and the end piece securely locks the entire construction in place.

More information about the types of decking
and the installation guide can be found on our website.



PROFILE



LINUP 30 MM

ref. 011938 - per piece

- Profile designed for supporting terraces
- Made of 80% recycled aluminum

Height: 30 mm

1.18 inch

Length: 2,40 m

94,49 inch

TOP PLATE



C-CLIP LINUP

ref. 012990 - 50 pcs/bag

- Compatible with the Comfort range
- Top plate developed to insert the Linup profiles





WOOD

LINUP CLIPS

Wood groove
for this clip:



- Possible in hardwood types: IPE, PADOEK, and CUMARU
- For other hardwood types, please contact us



CLIPS CONNECTOR

ref. 013058 - 15 pcs/box

- The profiles can be extended by sliding the connector piece into the profile and attaching the next profile to it



CLIPS EDGE 30 MM

ref. 013577 - 25 pcs/box

- Mounted at the start or end of the aluminium profile



CLIPS MEDIUM

ref. 011934 - 100 pcs/box

- Four angled upstands are each slid into the provided groove of the wooden decking
- The number of clips to be used depends on the type of wood

Joint width: 4 mm
0.16 inch



LATERAL TERRACE CONNECTOR

ref. 100427 - 20 pcs/box

- L-shaped
- Made of stainless steel
- For laterally connecting different profiles to each other



INOX L

ref. 010239 - 50 Inox L + 200 screws/box

- L-shaped
- Made of stainless steel
- For finishing open sides
- Accessory for creating stair steps

LINUP CLIPS

Wood groove
for this clip:



- Possible in hardwood types: MOSO bamboo, padauk and thermally treated wood
- For other hardwood types, please contact us



CLIPS CONNECTOR

ref. 013058 - 15 pcs/box

- The profiles can be extended by sliding the connector piece into the profile and attaching the next profile to it



CLIPS EDGE 30 MM

ref. 013577 - 25 pcs/box

- Mounted at the start or end of the aluminium profile



CLIPS SMALL

ref. 011931 - 100 pcs/box

- Four angled upstands are each slid into provided groove of the wooden shelf.
- The number of clips to be used depends on the type of wood.

Joint width: 5,5 mm
0.22 inch



LATERAL TERRACE CONNECTOR

ref. 100427 - 20 pcs/box

- L-shaped
- Made of stainless steel
- For laterally connecting different profiles to each other



INOX L

ref. 010239 - 50 Inox L + 200 screws/box

- L-shaped
- Made of stainless steel
- For finishing open sides
- Accessory for creating stair steps



WOOD

ACCESSORY




UNCLIPPING TOOL

ref. 013741 - per piece

- Linup clip removal tool

Length: 202,30 mm
8 inch

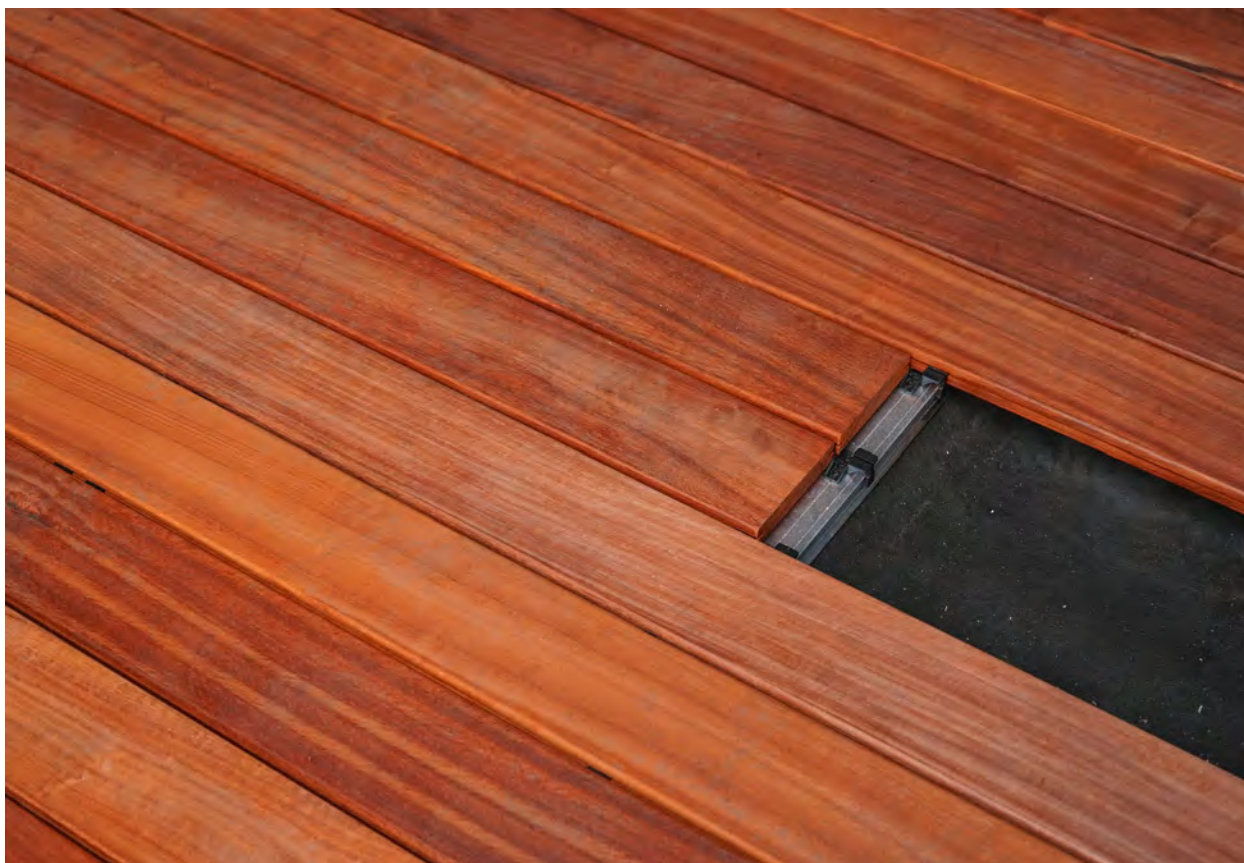

The background of the image is split vertically. The left half is a solid dark grey. The right half features vertical wooden planks with a light brown, natural wood grain. A horizontal window frame is visible on the left side, with a black metal bracket or clip attached to its edge, partially overlapping the wooden planks.

linup

**SEAMLESS CLADDING FOR
FACADES AND CEILINGS**

S




WOOD

EASY CLICK & SLIDE SYSTEM

SOLIDOR Linup for walls, facades and ceilings consists of a **12 mm/ 0.47 inch aluminium profile and matching clips**. With this system, you can fix wooden planks to facades or ceilings in no time. The clips create the perfect joint, and you finish with an end cap that secures the entire construction firmly in place.

- Invisible fixing
- Easy Click & Slide system
- The key to limitless wood designs
- Profiles made from 80% recycled aluminium
- Weather-resistant
- Unlimited possibilities in joint widths

You can find more information about the types of decking or the installation guide on our website.

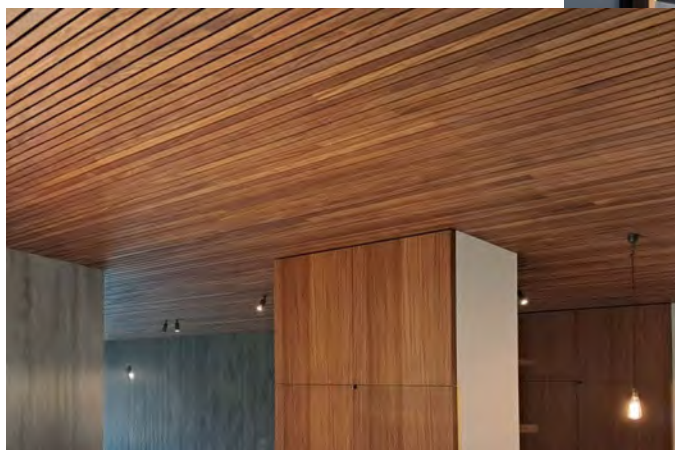

FACADE CLADDING, CEILING
LINUP

Installation video:



PROFILE



LINUP 12 MM

aluminium: ref. 011937 - per piece

black powder-coated aluminium: ref. 100043 - per piece

- Height of profile chosen according to load structure
- Made of 80% recycled aluminum

Height: 12 mm
0.47 inch

ACCESSORY



UNCLIPPING TOOL

ref. 013741 - per piece


- Linup clip removal tool

Length: 202,30 mm
8 inch



WOOD

FINISHING

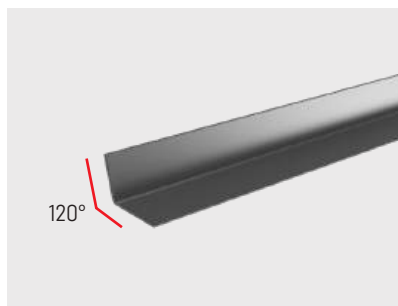

EDGE TRIM PROFILE


ref. 013150 - per piece

- Placed underneath the wooden boards
- Sloped rounded edge for water drainage (120°)
- Black lacquered aluminium
- Pre-drilled holes for fixing

Length: 2,40 m
94.49 inch

Width: 40 mm
1.57 inch

Thickness: 2 mm
0.08 inch

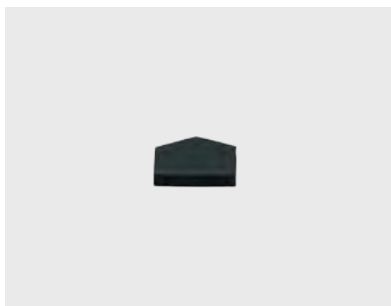

RUBBER VENTILATION BLOCKS 4MM

ref. 013249 - 300 pcs/box

- Insert between plank and alignment profile
- Avoid water accumulation

Joint width: 4 mm
0.16 inch


NEW



SPIDER

ref. 100719 - 50 pcs/box

- To be placed between the profile and the wooden board
- Fixing: the metal top is pressed into the board for a secure anchoring to the profile

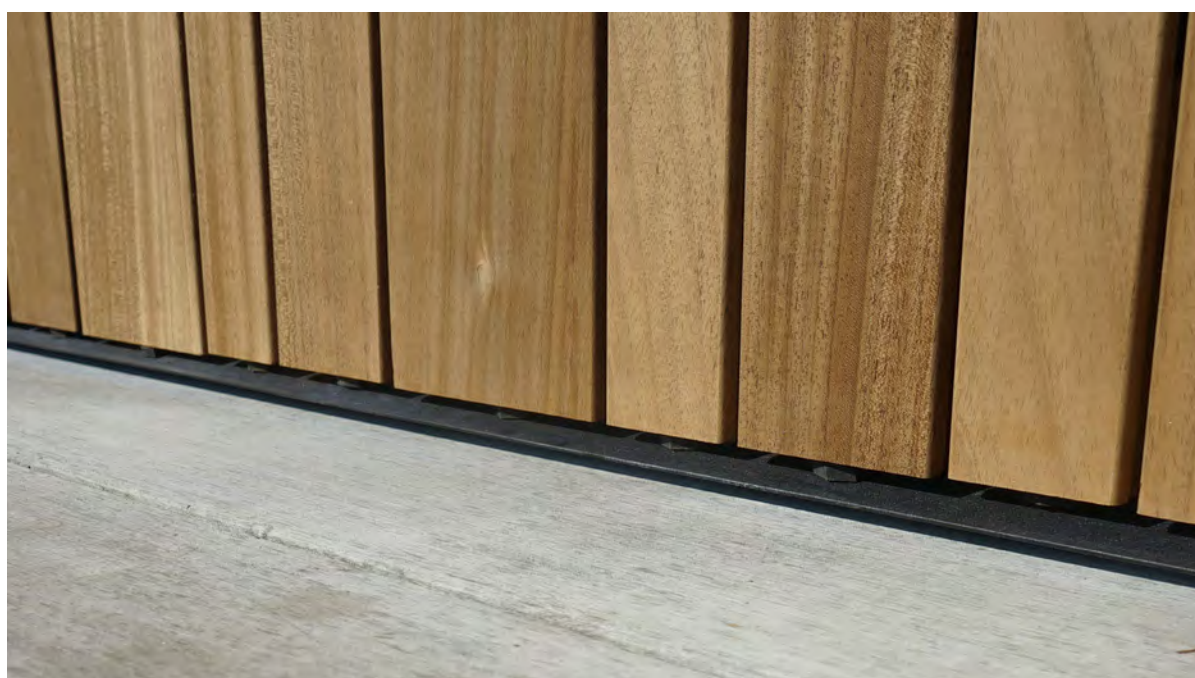

CLIPS

Wood groove
for this clip:



CLIPS MEDIUM

ref. 011934 - 100 pcs/box

- Four angled upstands are each slid into the provided groove of the wooden decking
- The number of clips to be used depends on the type of wood

Joint width: 6 mm
0.24 inch



CLIPS LARGE

ref. 011935 - 100 pcs/box

- Four angled upstands are each slid into the provided groove of the wooden decking
- The number of clips to be used depends on the type of wood


Joint width: 11 mm
0.43 inch



CLIPS EDGE

ref. 011936 - 25 pcs/box

- Is placed at the end and the beginning of the aluminum profile

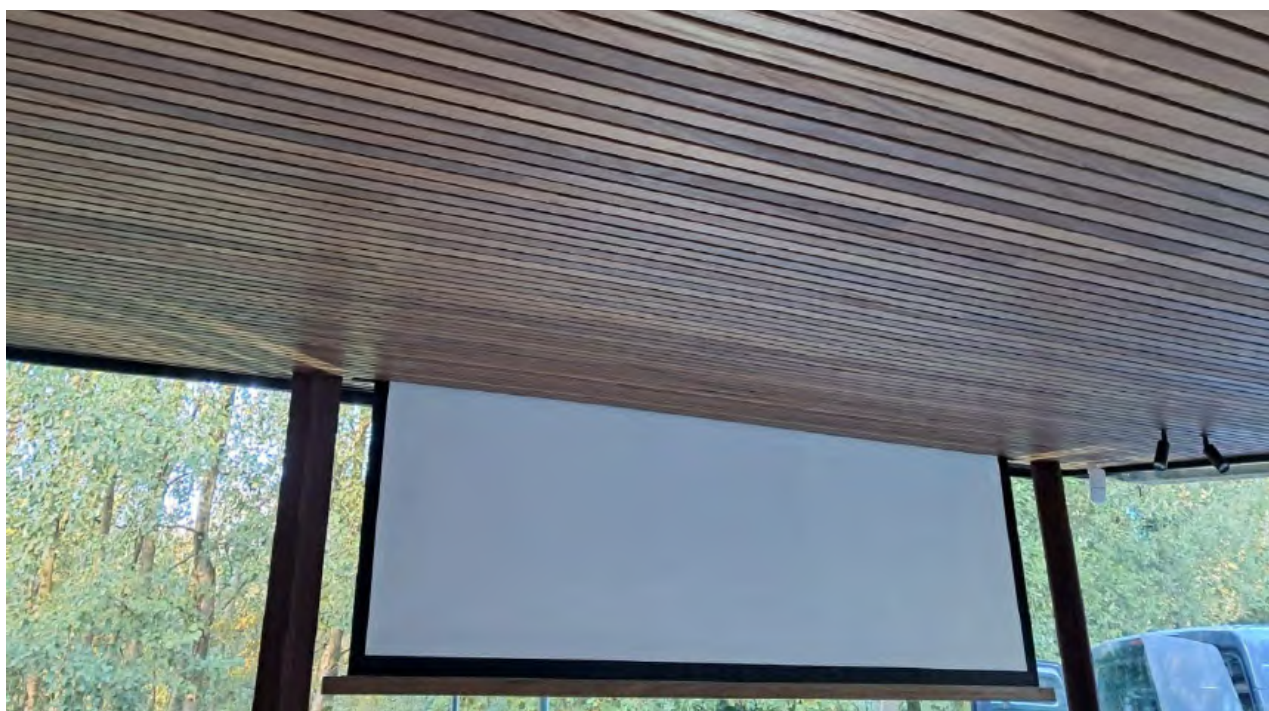




WOOD

CLIPS

Wood groove
for this clip:

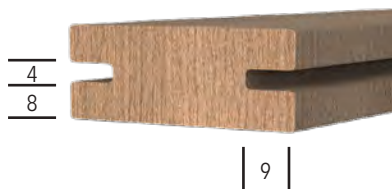

CLIPS SMALL

ref. 011931 - 100 pcs/box

- Four angled upstands are each slid into provided groove of the wooden shelf.
- The number of clips to be used depends on the type of wood
- Only possible with a symmetrical corner

Joint width: 8 mm
0.31 inch



CLIPS MEDIUM

ref. 011934 - 100 pcs/box

- Four angled upstands are each slid into provided groove of the wooden shelf.
- The number of clips to be used depends on the type of wood

Joint width: 13 mm
0.51 inch



CLIPS LARGE

ref. 011935 - 100 pcs/box

- Four angled upstands are each slid into provided groove of the wooden shelf.
- The number of clips to be used depends on the type of wood

Joint width: 18 mm
0.71 inch



CLIPS EDGE

ref. 011936 - 25 pcs/box

- Is placed at the end and the beginning of the aluminum profile



SIDESOL - EDGE PROFILES

SI



TILES

AESTHETIC, CLEAN FINISH

"Built to last a lifetime"

The SOLIDOR finishing profiles have been specially designed for finishing the edges of a terrace on terrace pedestals. These profiles are installed between the terrace pedestal and the tile and are available in three colours.

Advantages:

- Quick and easy installation
- Pre-drilled holes in the aluminium for added strength
- Robust and durable material
- Available in three stylish colours and various heights
- Supplied with connectors for seamless installation
- Made from 80% recycled aluminium
- The aluminium profile is 2,2 mm thick – unique!
0.09 inch thick - unique!

Installation video:



Available in three colours:




black



mid-grey




corten steel

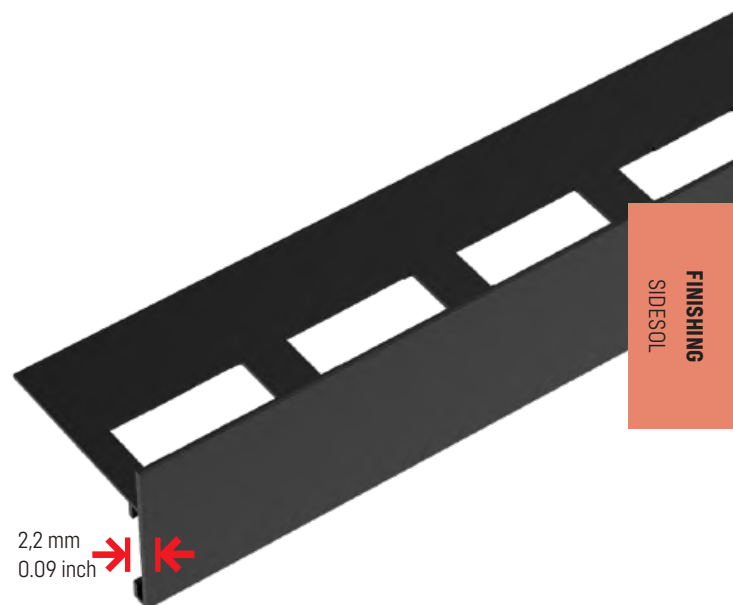

FINISHING
SIDESOL

STRAIGHT PROFILES

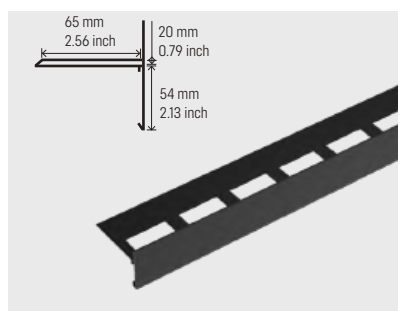


S 74

black: ref. 012443 - per piece
corten steel: ref. 012463 - per piece
mid-grey: ref. 012460 - per piece

- Available in three colours
- Connect the profiles with an SC connector at each end

Height: 74 mm
2.91 inch
Length: 2,40 m
94,49 inch
Thickness: 2,2 mm
1/13 inch

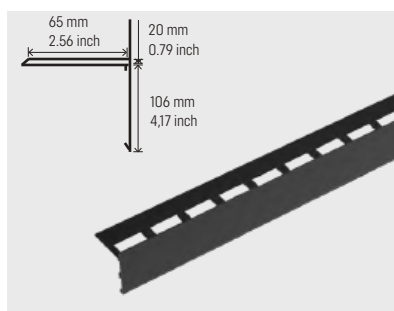


S 126

black: ref. 012466 - per piece
corten steel: ref. 012472 - per piece
mid-grey: ref. 012469 - per piece

- Available in three colours
- Connect the profiles with two SC connectors at each end

Height: 126 mm
4.96 inch
Length: 2,40 m
94,49 inch
Thickness: 2,2 mm
1/13 inch

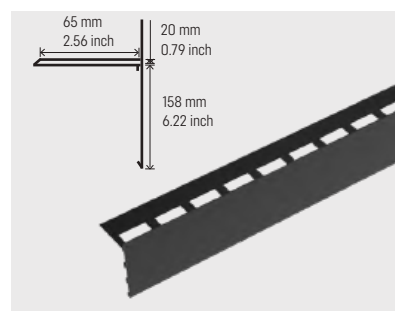


S 178

black: ref. 012475 - per piece
corten steel: ref. 012481 - per piece
mid-grey: ref. 012478 - per piece

- Available in three colours
- Connect the profiles with three SC connectors at each end

Height: 178 mm
7.01 inch
Length: 2,40 m
94,49 inch
Thickness: 2,2 mm
1/13 inch

EXTERNAL CORNER PROFILES 90-DEGREE

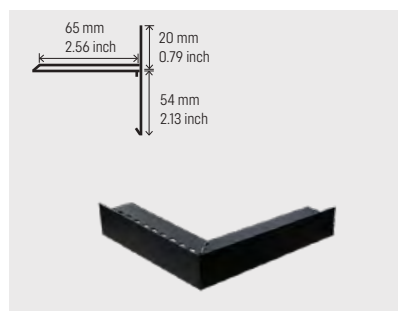


SBU 74

black: ref. 012444 - per piece
corten steel: ref. 012464 - per piece
mid-grey: ref. 012461 - per piece

- Available in three colours
- Connect the profiles with an SC connector at each end

Height: 74 mm
2.91 inch
Dimension: 285 x 285 mm
11.22 x 11.22 inch
Thickness: 2,2 mm
1/13 inch

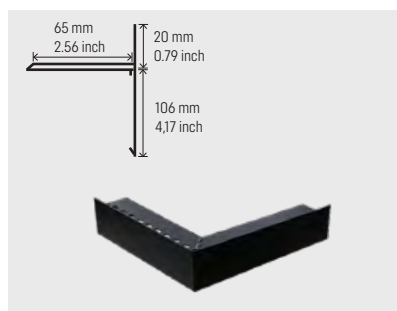


SBU 126

black: ref. 012467 - per piece
corten steel: ref. 012473 - per stuk
mid-grey: ref. 012470 - per stuk

- Available in three colours
- Connect the profiles with two SC connectors at each end

Height: 126 mm
4.96 inch
Dimension: 285 x 285 mm
11.22 x 11.22 inch
Thickness: 2,2 mm
1/13 inch

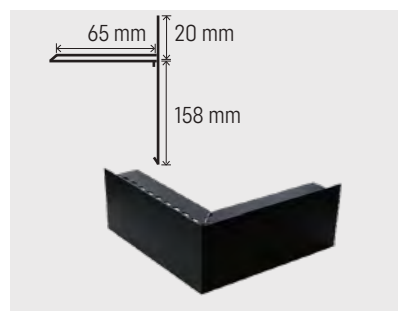

SBU 178

black: ref. 012476 - per piece
corten steel: ref. 012482 - per piece
mid-grey: ref. 012479 - per piece

- Available in three colours
- Connect the profiles with three SC connectors at each end

Height: 178 mm
7.01 inch
Dimension: 285 x 285 mm
11.22 x 11.22 inch
Thickness: 2,2 mm
1/13 inch



TILES

INTERNAL CORNER PROFILES 90 DEGREES



SBI 74

black: ref. 012459 - per piece
corten steel: ref. 012465 - per piece
mid-grey: ref. 012462 - per piece

- Available in three colours
- Connect the profiles with an SC connector at each end

Height: 74 mm
2.91 inch

Dimension: 285 x 285 mm
11.22 x 11.22 inch

Thickness: 2,2 mm
1/13 inch



SBI 126


black: ref. 012468 - per piece
corten steel: ref. 012474 - per piece
mid-grey: ref. 012471 - per piece

- Available in three colours
- Connect the profiles with two SC connectors at each end

Height: 126 mm
4.96 inch

Dimension: 285 x 285 mm
11.22 x 11.22 inch

Thickness: 2,2 mm
1/13 inch

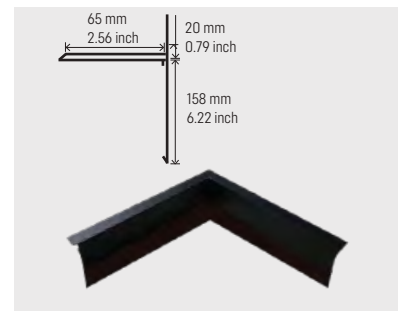

SBI 178

black: ref. 012477 - per piece
corten steel: ref. 012483 - per piece
mid-grey: ref. 012480 - per piece

- Available in three colours
- Connect the profiles with three SC connectors at each end

Height: 178 mm
7.01 inch

Dimension: 285 x 285 mm
11.22 x 11.22 inch

Thickness: 2,2 mm
1/13 inch

CONNECTION PLATE

Available in three colours:



black



mid-grey



corten steel



SC CONNECTOR

black: ref. 012484 - per piece
corten steel: ref. 013190 - per piece
mid-grey: ref. 013189 - per piece

- Compatible with all Sidesol profiles
- Allow for a clearance of at least 2,5 mm/ 0.1 inch between adjacent profiles
- Available in three colours

Length: 100 mm
3.94 inch



DRAINSOL - DRAINAGE AND VENTILATION PROFILES

**S
I**



TILES



WOOD

The drainage and ventilation profiles from SOLIDOR have been specially designed for the installation of a terrace on terrace pedestals, allowing large volumes of water to be efficiently removed from the surface. This prevents water accumulation and damage to adjacent structures.

Advantages:

- Easy and quick installation
- Pre-formed holes in the profiles allow for sub-surface ventilation and easy drainage of large volumes of water
- Robust and durable material
- Available in two colours and different widths

Available in these colours:



black



mid-grey

Corten steel colour available on request.



FINISHING
DRAINSOL

PROFILES



DS 56

black: ref. 014093 - per piece
mid-grey: ref. 014094 - per piece

• Available in two colours

Height: 20 mm
0.79 inch
Length: 2,40 m
94.49 inch
Thickness: 4 mm
0.16 inch
Width: 56 mm
2.20 inch



DS 156

black: ref. 014096 - per piece
mid-grey: ref. 014095 - per piece

• Available in two colours

Height: 20 mm
0.79 inch
Length: 2,40 m
94.49 inch
Thickness: 4 mm
0.16 inch
Width: 156 mm
6.14 inch

Available in these colours:



black



mid-grey




TILES



WOOD



FINISHING
DRAINSOL

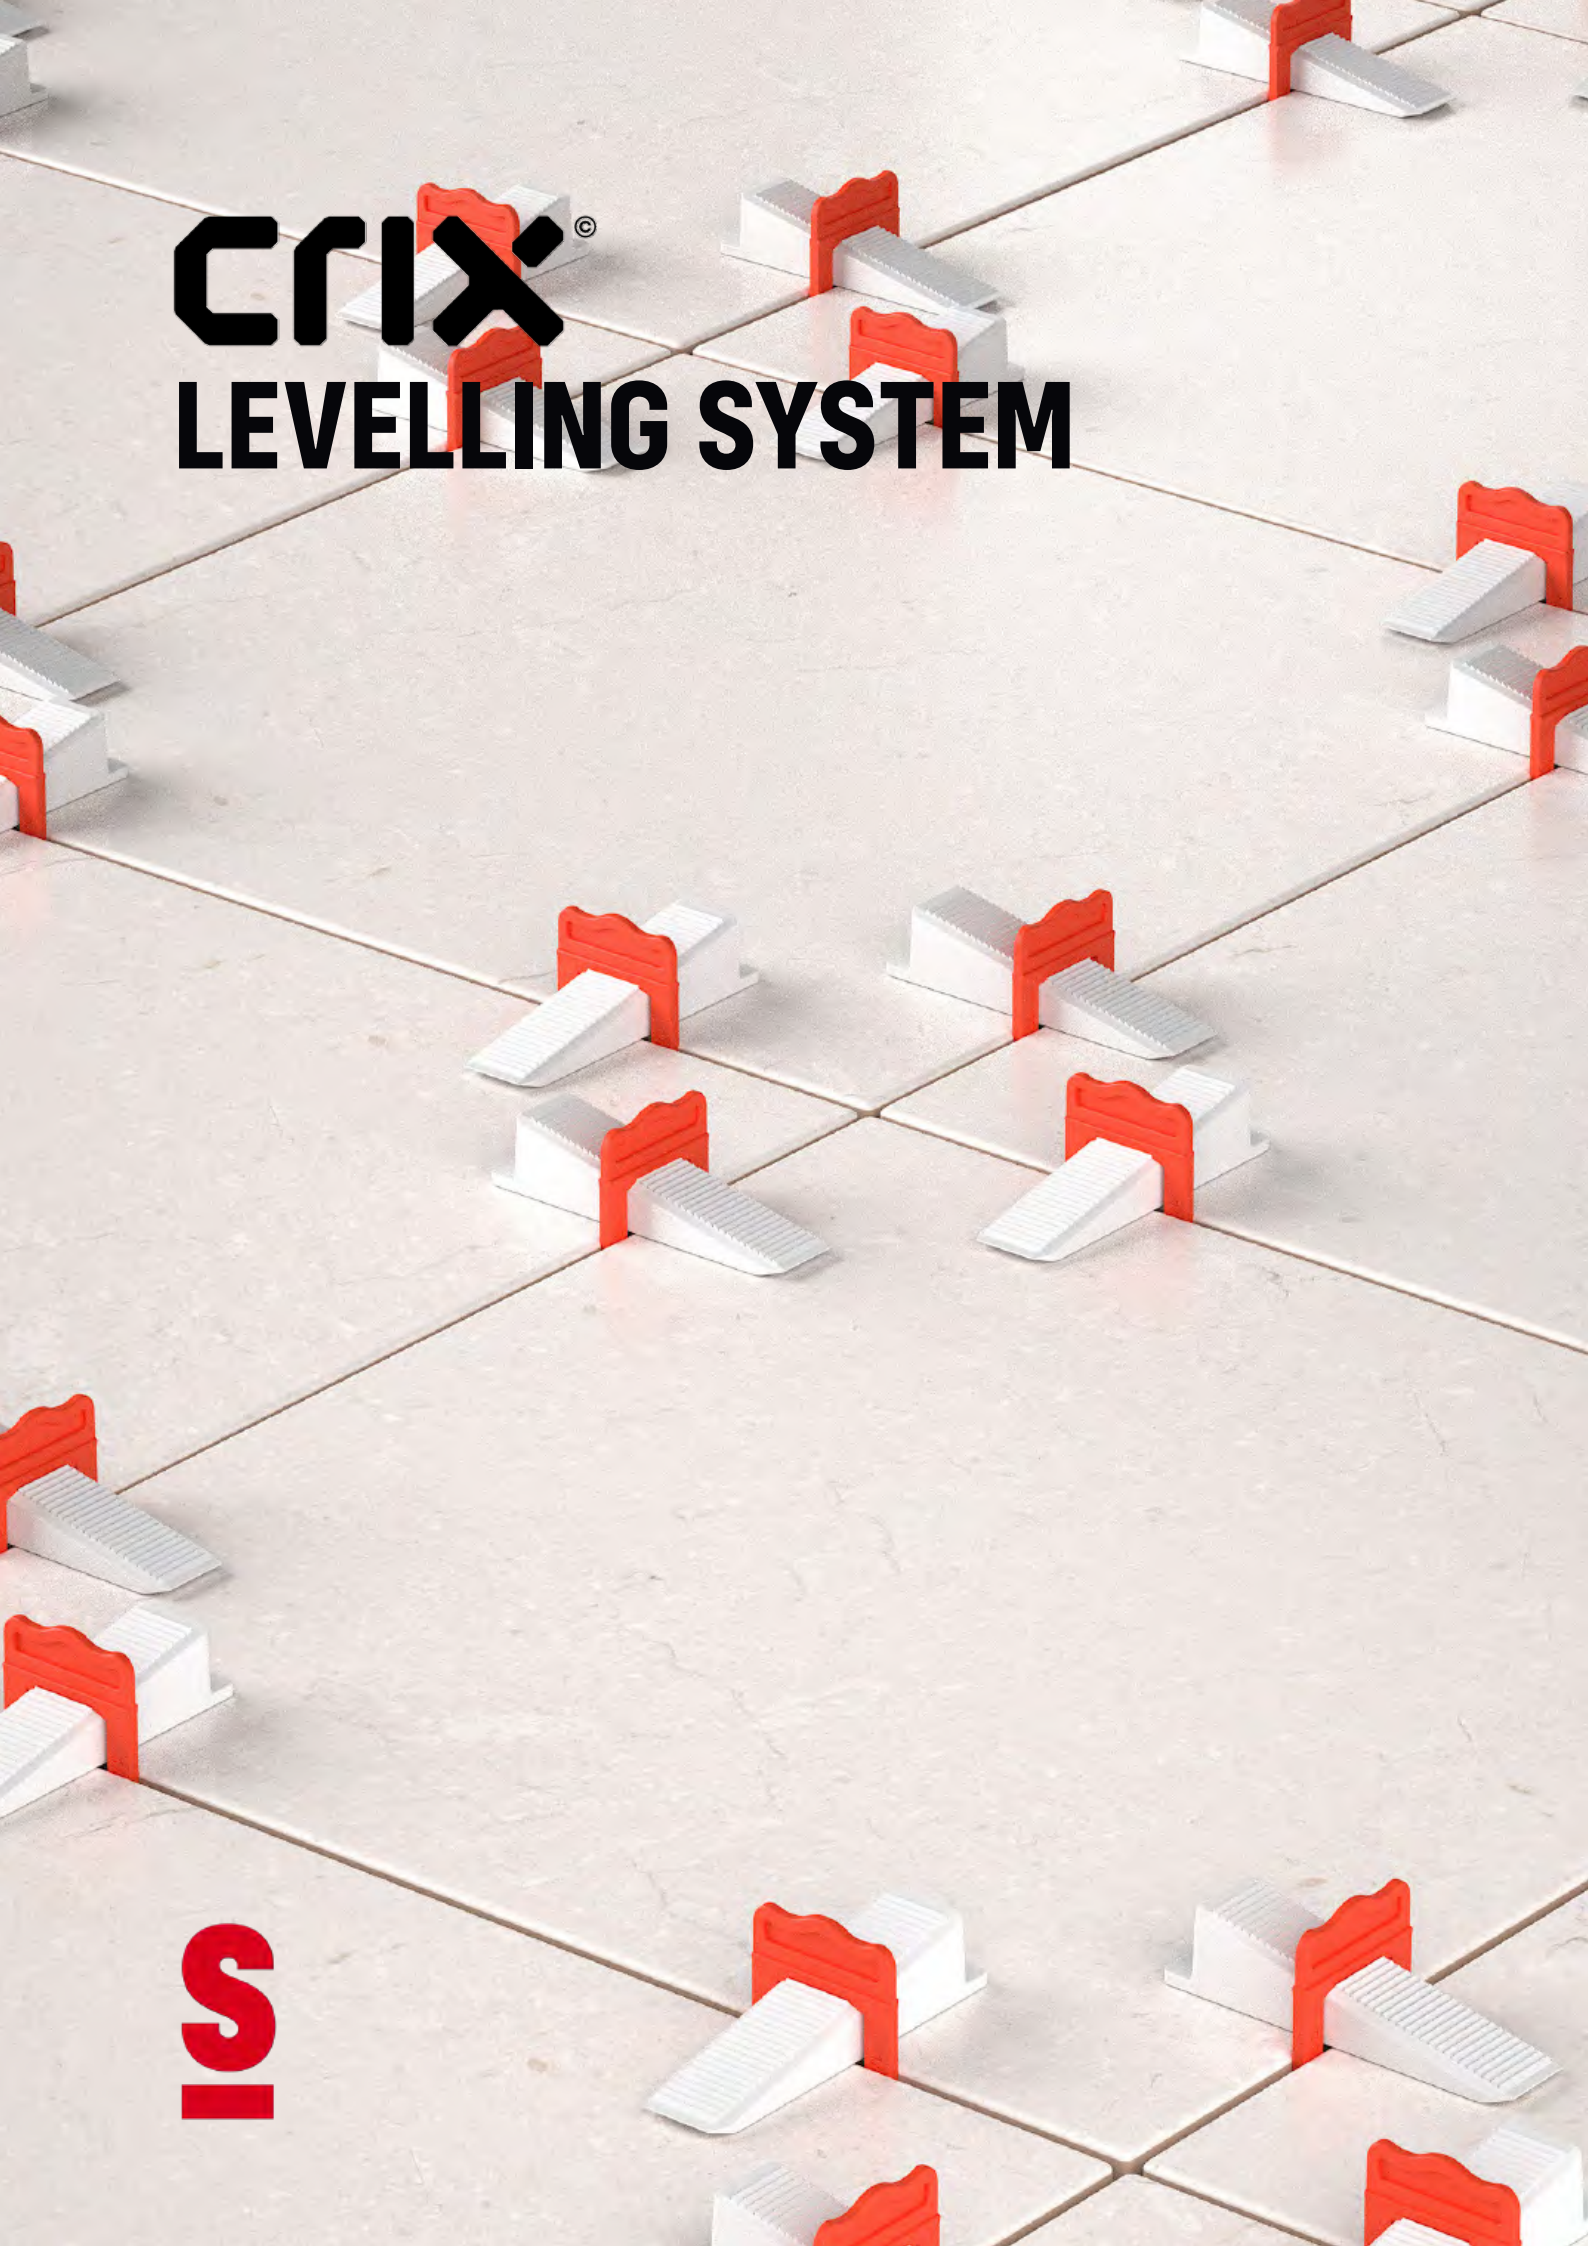

CRIX[®] **LEVELLING SYSTEM**



S



TILES

FASTER, MORE EFFICIENT INSTALLATION

The **patented rounded design** prevents interruptions and ensures a faster and more efficient installation. The CRIX range guarantees a perfectly level installation and a sleek finish for tiled floors and walls, and the clips have a perfectly calibrated breaking point.

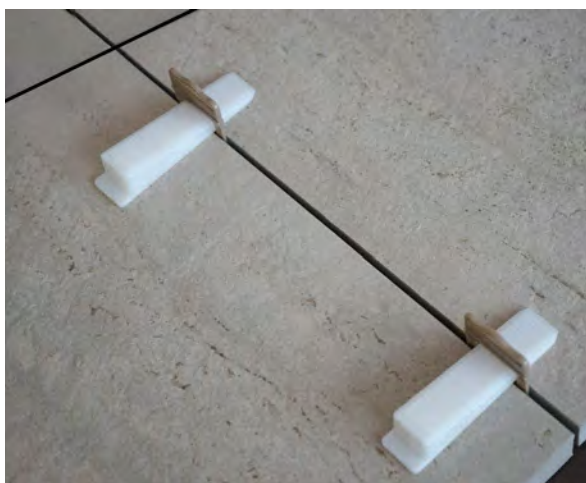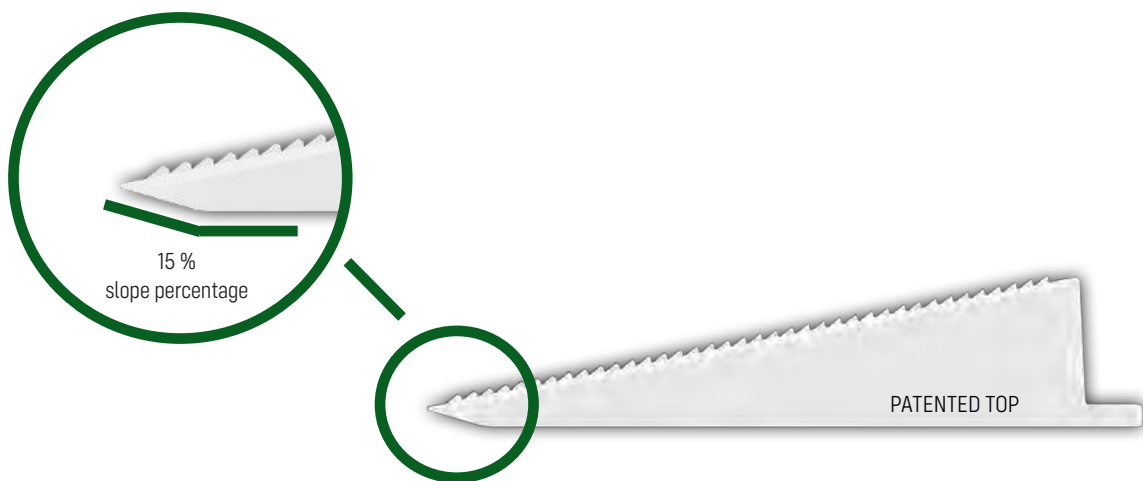

LEVELLING SYSTEM
CRIX

CRIX WEDGE



WEDGE

ref. 011949 - 250 pcs/bag

- Made from sturdy durable material
- Intended for a long-term use
- The patented rounded design prevents snagging



CRIX CLIPS: 3 - 13 MM



CLIPS 1 MM 1/32 INCH

ref. 012416 - 250 pcs/bag
ref. 011752 - 500 pcs/bag



CLIPS 1,5 MM 1/16 INCH

ref. 012417 - 250 pcs/bag
ref. 011755 - 500 pcs/bag



CLIPS 2 MM 1/13 INCH

ref. 012418 - 250 pcs/bag
ref. 011943 - 500 pcs/bag



CLIPS 3 MM 1/8 INCH

ref. 012419 - 250 pcs/bag
ref. 011946 - 500 pcs/bag



TILES

CRIX CLIPS XL: 12 - 22 MM



CLIPS XL 1,5 MM 1/16 INCH

ref. 012935 - 250 pcs/bag



CLIPS XL 3 MM 1/8 INCH





ref. 012202 - 250 pcs/bag



CLIPS XL 5 MM 3/16 INCH


ref. 012353 - 250 pcs/bag

STEP-BY-STEP GUIDE

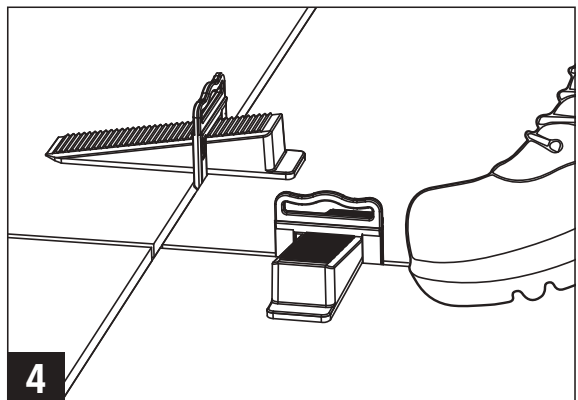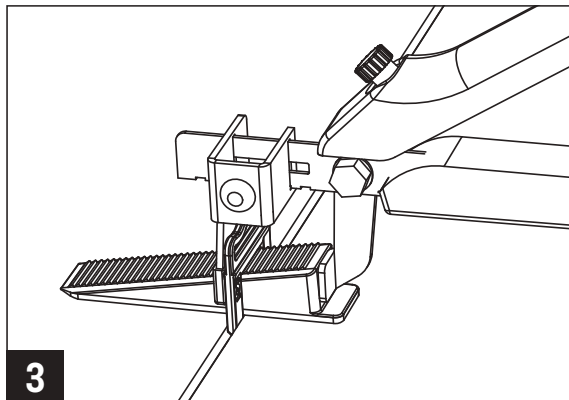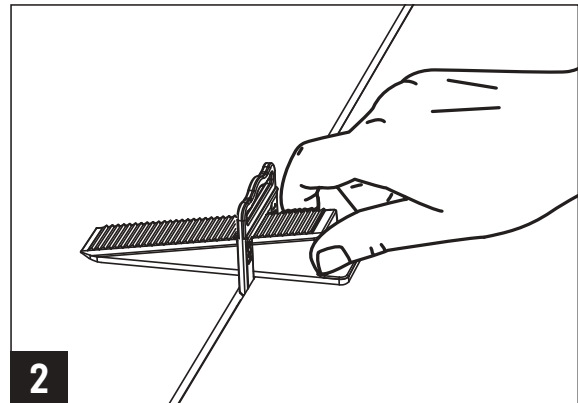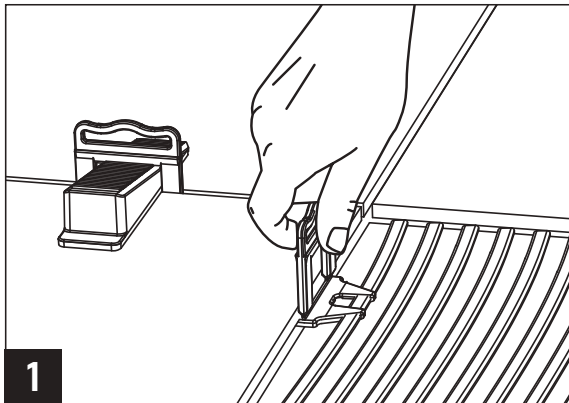


TILE SPACERS

The tile spacers are available in bags of 200 pieces.

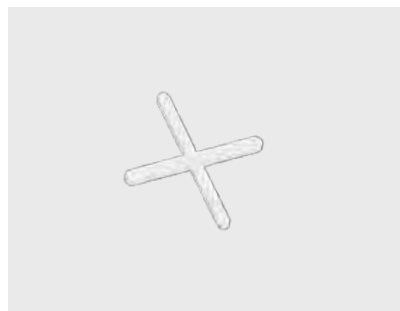


TILE SPACER 1 MM 1/32 INCH

per box: ref. 013067 - 4.000 pcs/box

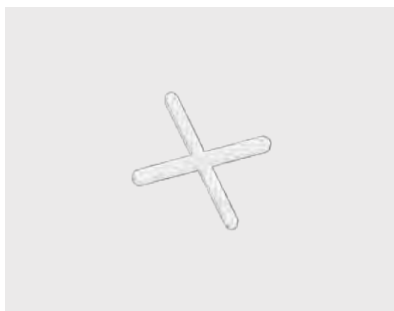

TILE SPACER 1,5 MM 1/16 INCH

per box: ref. 013068 - 4.000 pcs/box

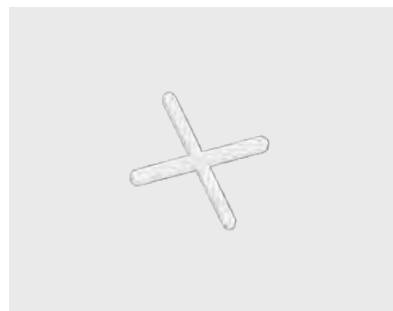

TILE SPACER 2 MM 1/13 INCH

per box: ref. 013069 - 4.000 pcs/box



TILE SPACER 3 MM 1/8 INCH

per box: ref. 013070 - 4.000 pcs/box



TILE SPACER 4 MM 5/32 INCH

per box: ref. 013071 - 4.000 pcs/box



TILE SPACER 5 MM 13/64 INCH

per box: ref. 013072 - 4.000 pcs/box






PROTECTIVE PLATE



ref. 011951 - 250 pcs/box

- Used to prevent damage to terrace, floor and wall tiles



Use the diagram to calculate the number of clips per square meter.

CRIX BUCKET



BUCKET CLIPS 1 MM 1/32 INCH

ref. 013660 - 250 clips 1 mm + 250 wedges +
1 plier



BUCKET CLIPS 1,5 MM 1/16 INCH

ref. 013661 - 250 clips 1,5 mm + 250 wedges +
1 plier



BUCKET CLIPS 2 MM 1/13 INCH

ref. 013662 - 250 clips 2 mm + 250 wedges +
1 plier



BUCKET CLIPS 3 MM 1/8 INCH

ref. 013663 - 250 clips 3 mm + 250 wedges +
1 plier



BUCKET CLIPS XL 1,5 MM 1/16 INCH

ref. 013664 - 250 clips XL 1,5 mm + 250 wedges +
1 plier



BUCKET CLIPS XL 3 MM 1/8 INCH

ref. 013665 - 250 clips XL 3 mm + 250 wedges +
1 plier



BUCKET CLIPS XL 5 MM 3/16 INCH


ref. 013666 - 250 clips XL 5 mm + 250 wedges +
1 plier




TRY THE CRiX
CALCULATOR



LEVELLING SYSTEM
CRiX

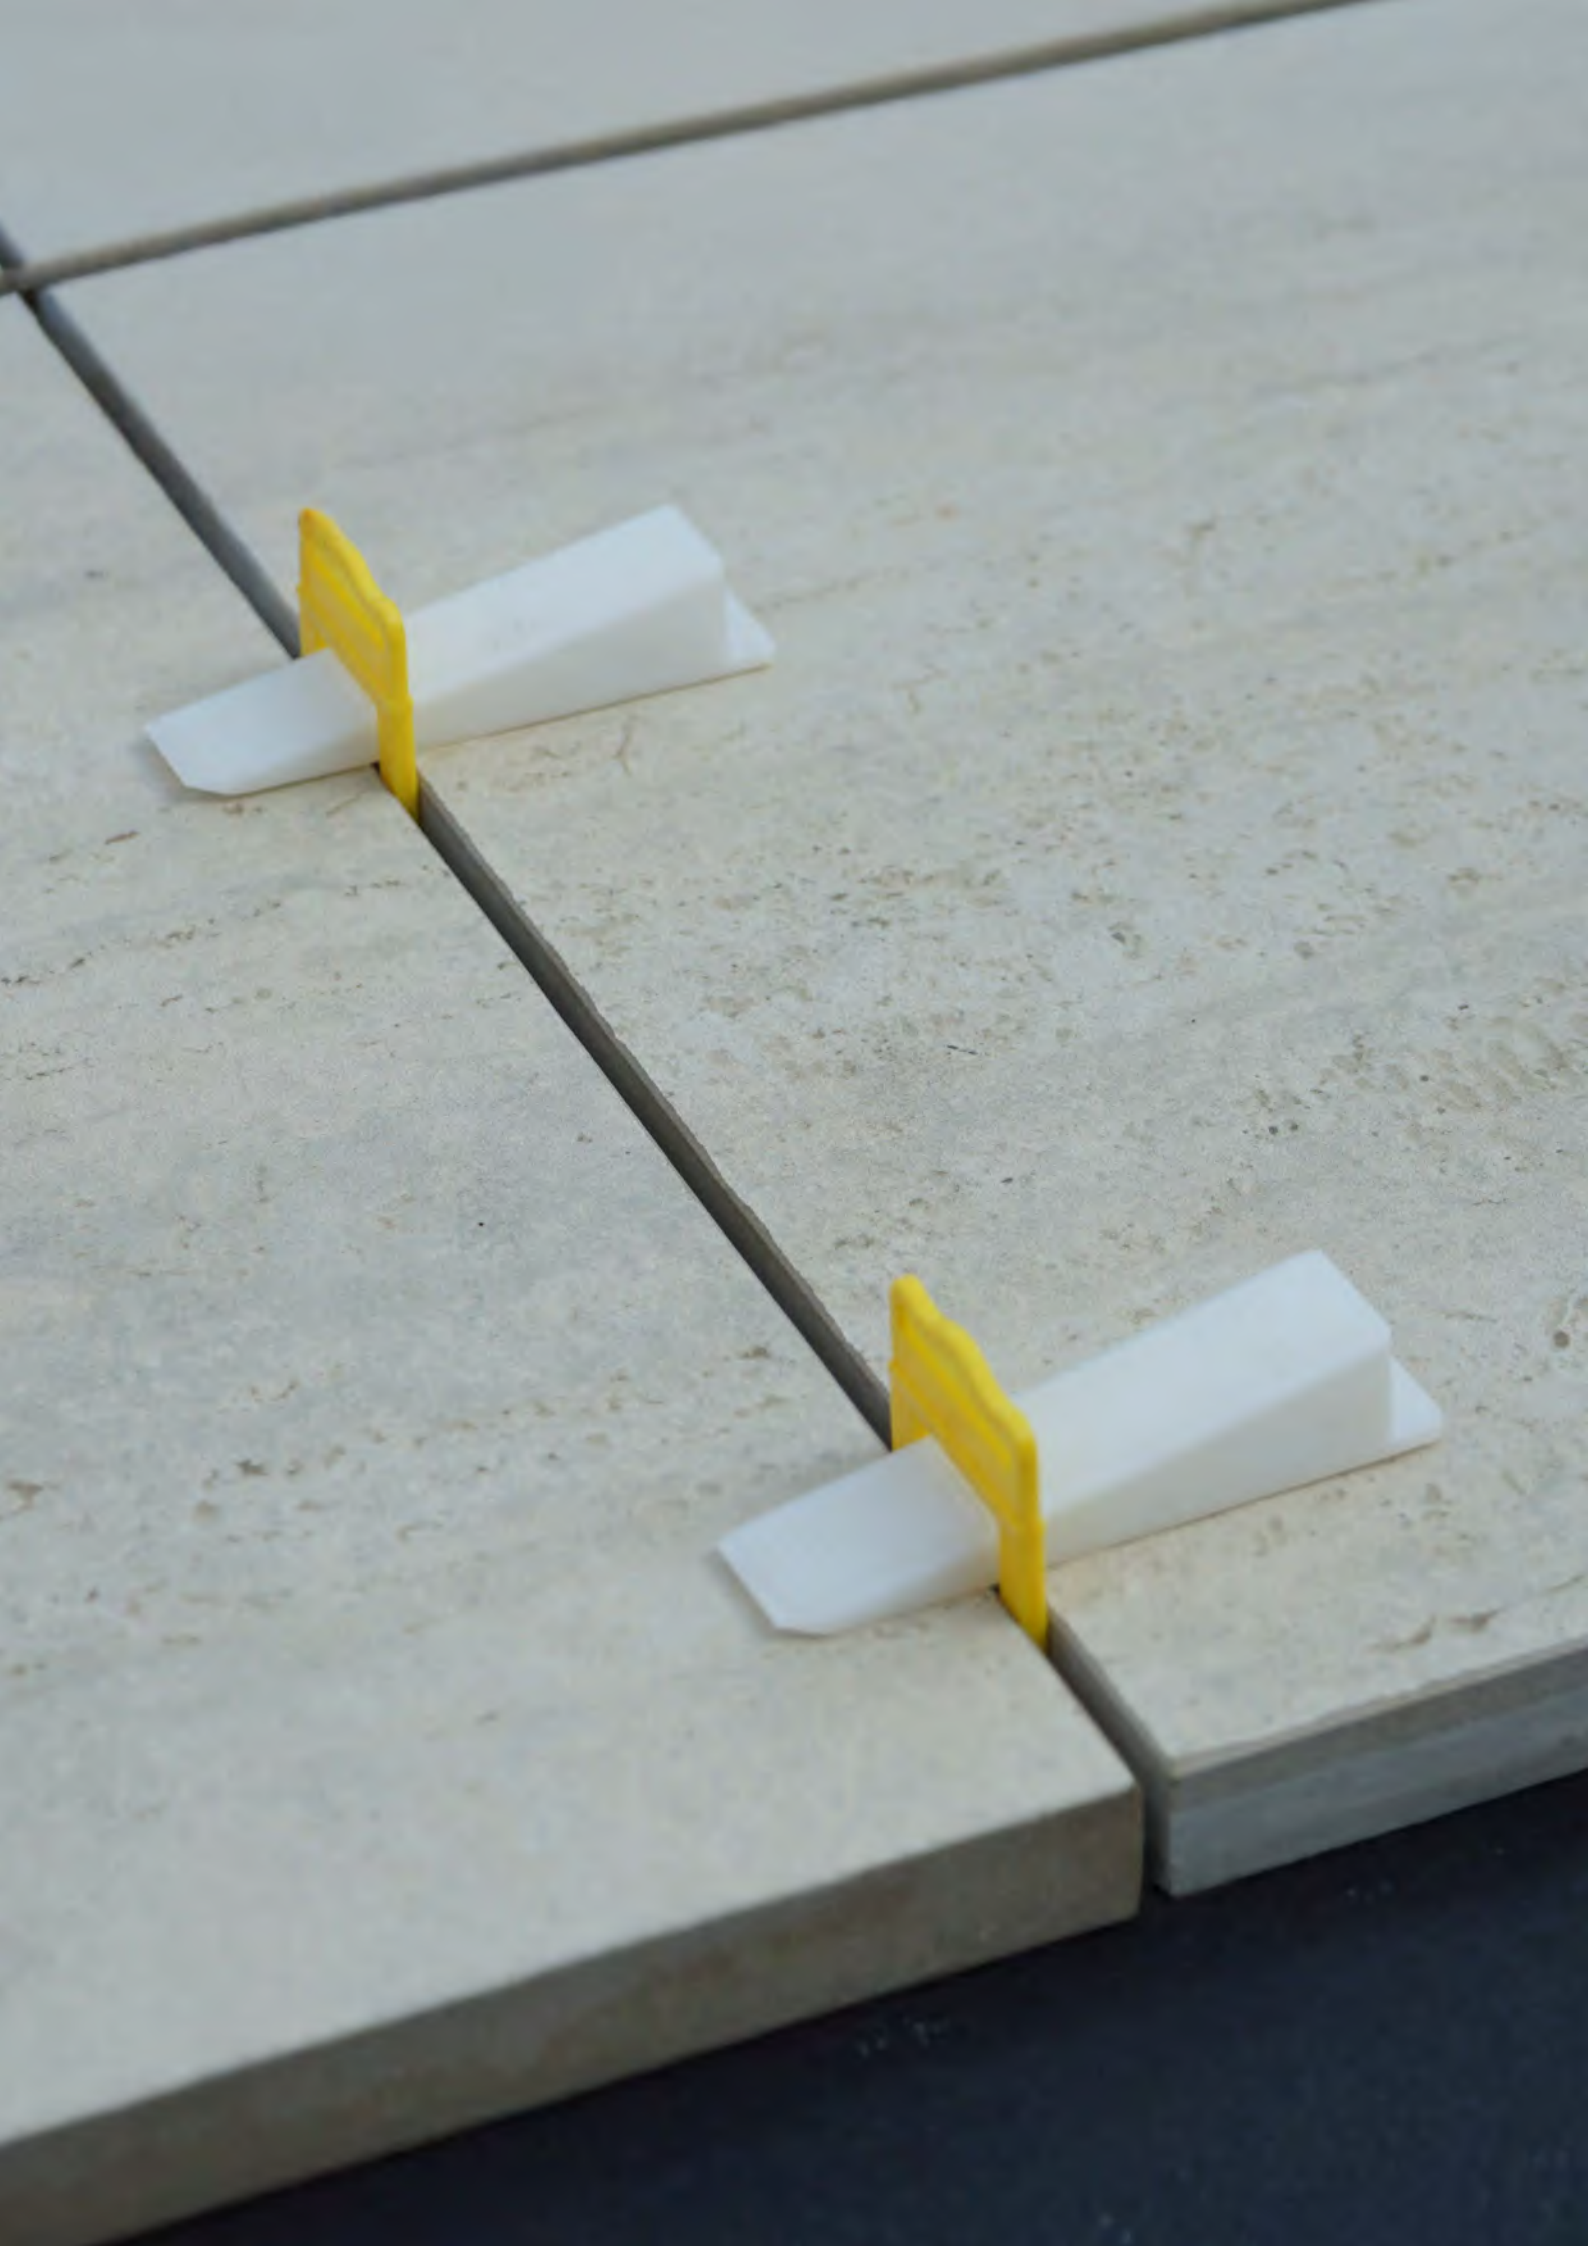

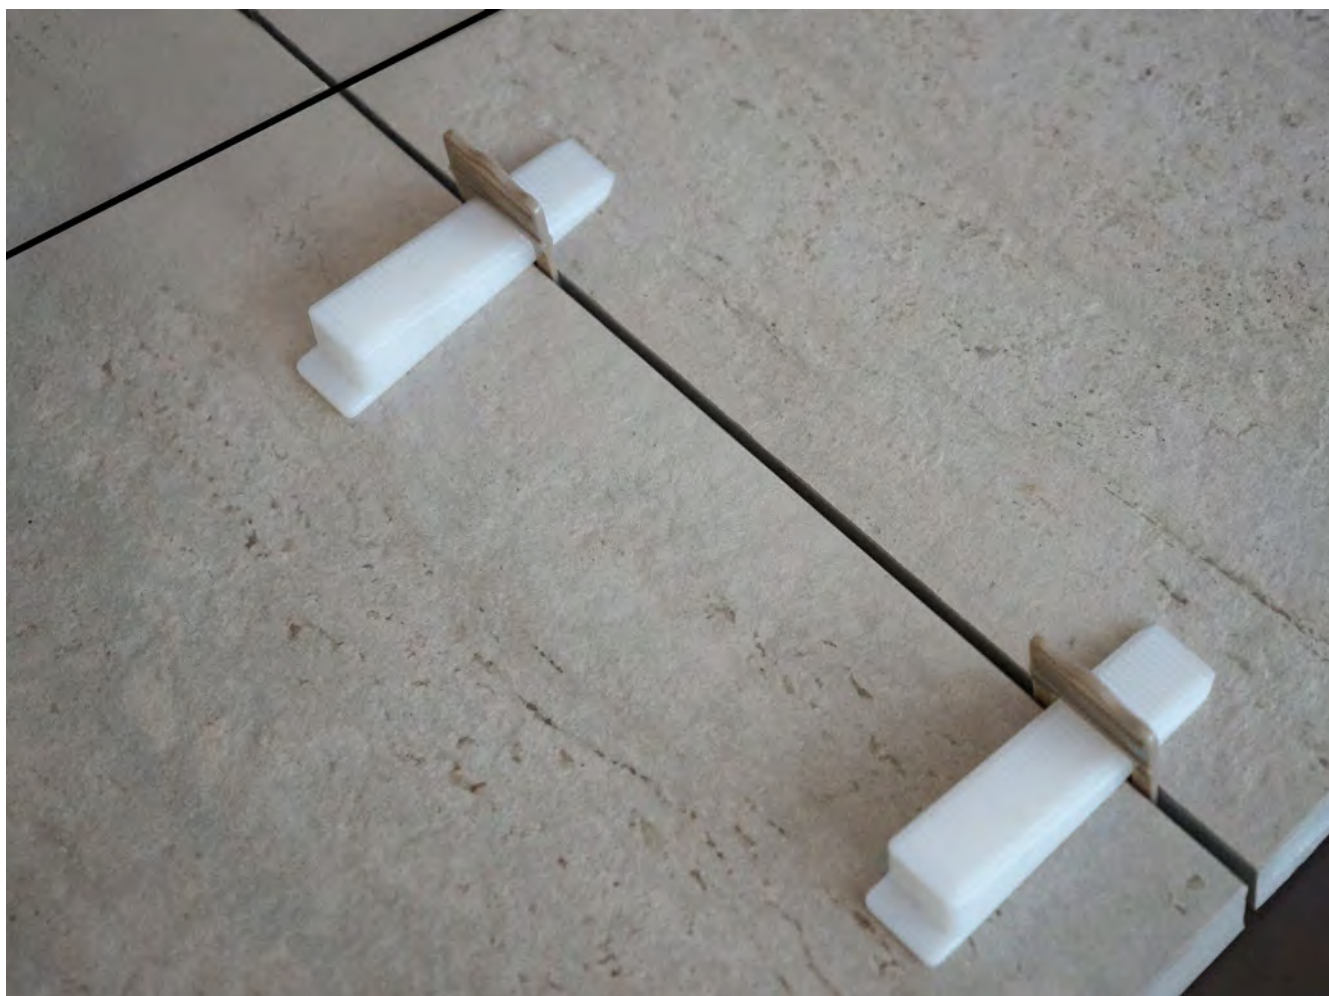


GRAVIERSOL - GRAVEL STABILISATION





GRAVEL ROCK

VARIANTS

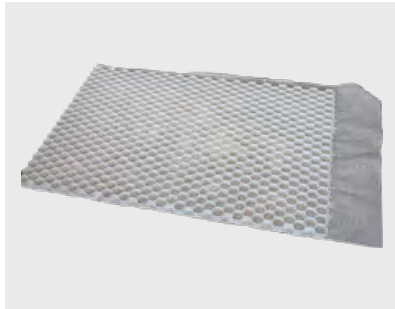

GS 30 WHITE

ref. 010341 - per piece

Dimension: 120 x 80 x 3 cm
4.72 x 3.15 x 0.12 inch

Pieces per pallet: 75 pieces



GS 30 BLACK

ref. 010342 - per piece

Dimension: 120 x 80 x 3 cm
4.72 x 3.15 x 0.12 inch

Pieces per pallet: 75 pieces

Installatievideo:



PARKING STOPPER



PARKING STOPPER FOR GRAVIERSOL


ref. 013581 - 20 pcs/box

Height: 40 mm (120 x 80 x 3,0)
1.57 inch (4.72 x 3.15 x 0.12 inch)
50 mm (120 x 80 x 4,0)
1.97 inch (4.72 x 3.15 x 0.16 inch)

Dimensions: 41 x 41 mm
1.61 x 1.61 inch

Advantages:

- Easy placement
- Natural look
- 100% recycled material
- Strong coupling system
- No more trace formation or potholes
- Density geotextile 90 gr/m²
- UV-resistant

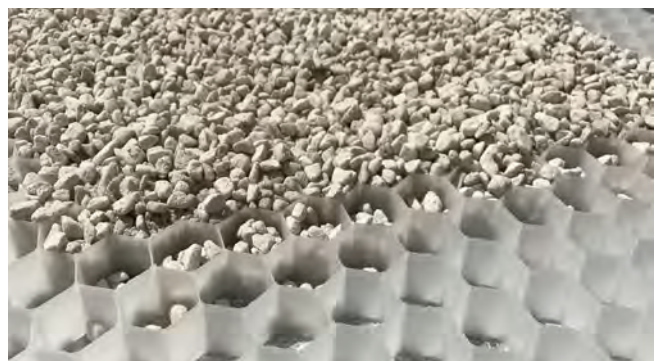

**AVAILABLE
WORLDWIDE**



Head office & factory
Wevelgem, Belgium



ABOUT SOLIDOR – QUALITY AND SUSTAINABILITY SINCE 1978



ECOLOGICAL AND RESPONSIBLE


Our adjustable terrace pedestals are made from recycled plastics to minimise environmental impact. During the production process, no waste is generated, and the used pedestals can be reused or reprocessed in our own production, ensuring a fully circular lifecycle.

For these efforts, we have already received two EcoVadis ratings. These ratings assess how sustainably a company operates. Our goal is to continue improving and become even more sustainable in the future. This QR code provides insight into our current initiatives to contribute to a more sustainable world.



MODULAR AND AESTHETIC


SOLIDOR offers a wide range of possibilities with a high standard of finish for the most complex situations and environments. Because the pedestals are infinitely adjustable in height with extreme precision, any terrace can be laid completely level, regardless of the slope or the type of substrate. The system is easy to install without any construction or demolition work, and it also offers the possibility of connecting the patio seamlessly to the building.

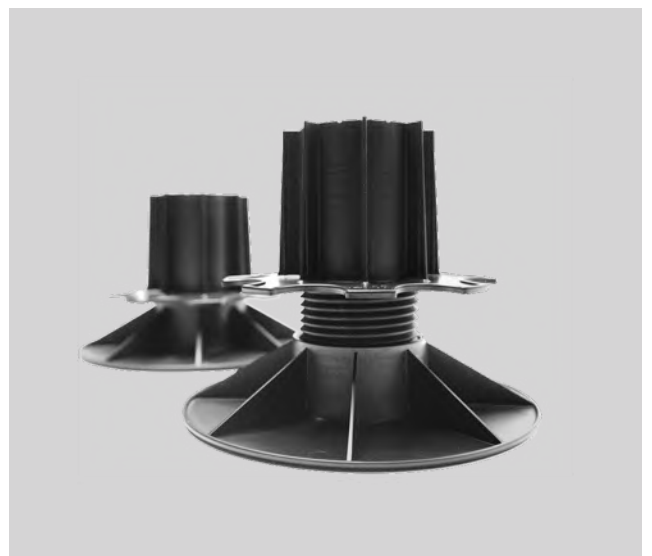



TESTED AND PROVEN SINCE 1978

Our adjustable terrace pedestals are a proven system that has been used since 1978 in various outdoor applications. Our systems are continually tested and are stable, wind-resistant and water-permeable. We manufacture them entirely in-house and test them under the most extreme weather conditions. By using plastic, the adjustable terrace pedestals offer good sound insulation and in addition, they are also available in fire-retardant versions.

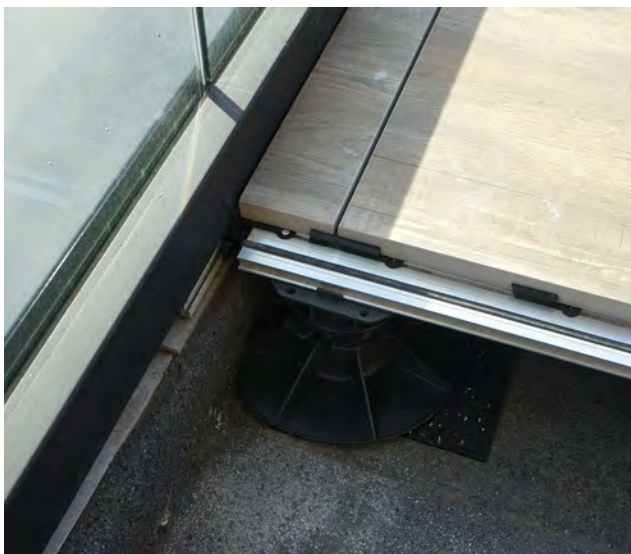

EPD CERTIFICATE

Sustainability, technically substantiated

With SOLIDOR adjustable terrace pedestals with top plate, you choose a well-considered terrace build-up in which functionality, sustainability and transparency come together. This solution was developed for raised terraces with tile or timber finishes and combines a refined technical structure with a demonstrably responsible choice of materials.

The terrace pedestal is continuously adjustable and makes it possible to level terraces accurately, even on substrates with slopes or height differences. Thanks to the dry and loose-laid installation, fitting is fast, clean and does not require additional fixing materials. This results in efficient installation and a neatly finished end result.

What makes this solution particularly relevant for today's construction projects is the objectively substantiated environmental information. A third-party verified EPD is available for this product, drawn up in accordance with EN 15804+A2. This provides validated data that can be used in projects where sustainability, material transparency and professional documentation are playing an increasingly important role.

The terrace pedestal is manufactured in Belgium and consists of 98% recycled polypropylene. In addition, the EPD is based on a reference service life of 30 years, positioning the product as a sustainable and future-oriented choice for high-quality terrace constructions.

The system also offers clear added value in terms of circularity. The terrace pedestals are loose-laid, easy to dismantle and designed with a reversible build-up in mind. This not only simplifies processing on site, but also facilitates later adjustments or dismantling.

Key qualities:

- Third-party verified EPD in accordance with EN 15804+A2
- 98% recycled polypropylene
- Manufactured in Belgium
- Continuously adjustable terrace pedestals
- Fast, dry installation without demolition work
- Suitable for tiled and timber terraces
- Reference service life of 30 years
- Easy to dismantle and reversible system



BREAKING TEST

Proven load-bearing capacity up to 1,400 kg per pedestal

SOLIDOR terrace pedestals have been tested up to a breaking load of 1,400 kg per pedestal. This value confirms the structural strength of the system under high load conditions.

The high load-bearing capacity is the result of:

- a wide and stable base → optimal load distribution on the substrate
- a robust screw thread → no deformation under load
- a technically designed top plate → stable support for tiles or decking boards

On site, this translates into a system that remains stable, does not sink, does not shift and maintains its level under normal use, including point loads and frequent traffic.

The system is suitable for:


- tiles, timber and composite decking
- applications on concrete, screed, EPDM and bitumen
- projects with higher structural requirements, such as roof terraces, roof gardens, hospitality terraces and apartment buildings

Thanks to the adjustable height, slopes and level differences can be accurately compensated for without affecting the underlying roof structure.

SOLIDOR manufactures in Belgium for professional applications where reliability and durability should not be open to question. The pedestals are made from high-quality polypropylene, are UV-resistant and frost-resistant down to -25°C.

Disclaimer:

The breaking load test is not representative of long-term performance. In case of doubt, please contact SOLIDOR. The higher the terrace build-up, the lower the load-bearing capacity may be.

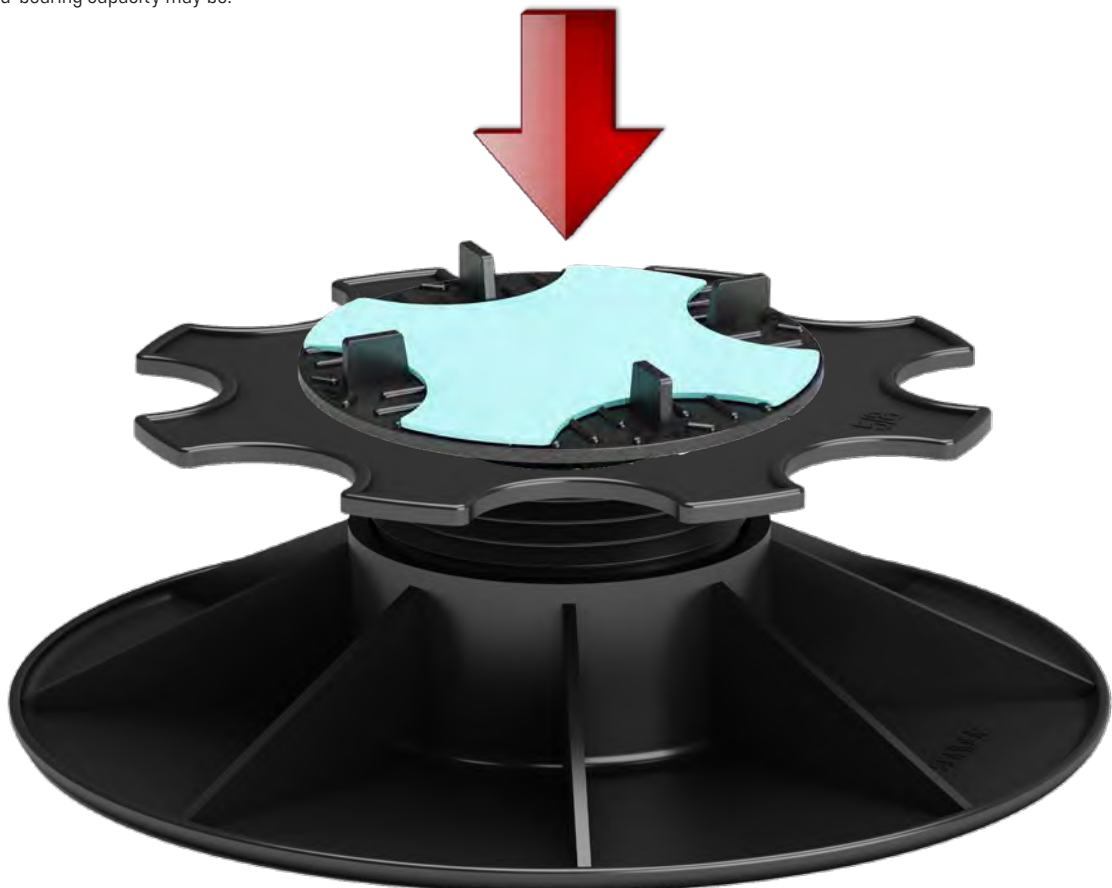



1978

Bernard Dejans and his wife Monique start producing adjustable terrace pedestals.

1984

Emmanuel Dejans, son of Bernard and Monique, joins the family business.

2007

Sons Emmanuel and Olivier take over the tasks of Bernard and Monique in the Lauwe branch.



1982

Purchase of the first extrusion line for the production of rubber plastic profiles.

1990

Olivier Dejans, brother of Emmanuel, joins the family business.

2013

Purchase of office in Wevelgem as an extension to the injection-moulding department.





2018

Production of flexible and technical plastic profiles moved to new industrial building.

2021

Solidor Rubber and Products is divided into SOLIDOR, RUBIDOR and Dextr.

2026


First luminous/illuminated top plate on the market, called **LUNISOL**.


2017

Henri Dejans, son of Emmanuel, is strengthening the team.

2024

SOLIDOR is expanding its range with CRIX, a new in-house-produced levelling system, and LINUP, an invisible fastening system for wooden decking on façades, ceilings and terraces.

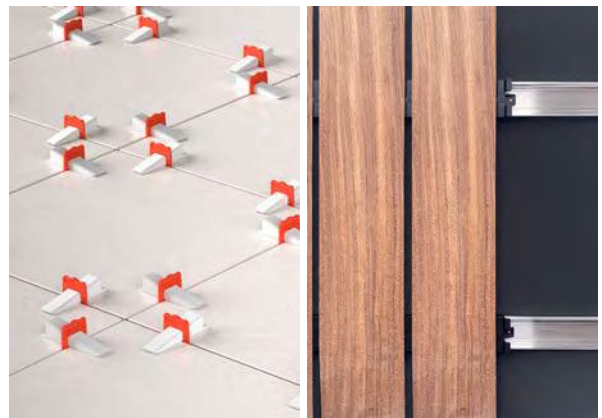

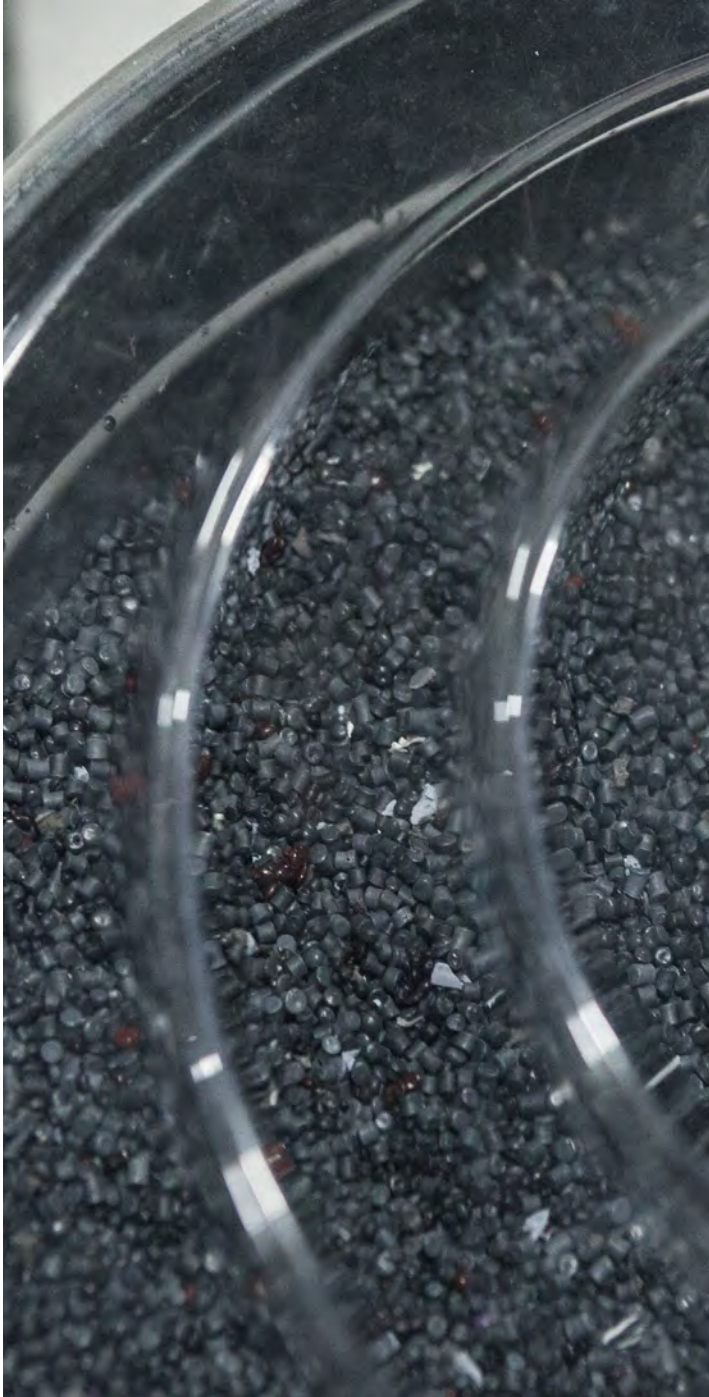



MORE INFO

Kouterstraat 11 b
8560 Wevelgem
Belgium

T +32 56 41 35 70
info@solidor.be

solidor.be/en

