


SPECIFICATIONS

The PV 14/17 is an adjustable pedestal with a range of 140-170mm/5,51-6,69 inch. This pedestal is adjustable by its screw clamping system and consists of two pieces. All top plates and accessories for use with the Comfort range can be placed on this pedestal. The bottom piece has eight vertical reinforcement ribs and 4 holes. The top piece of the Comfort pedestal has eight blocking ribs.

Colour	Black
Support area	300 cm ² 46,50 in ²
Outside diameter	215 mm 8,46 inch
Weight	300 g/piece
Adjustable height	140-170 mm 5,51-6,69 inch



Recycled material



Weatherproof



Resistant to temperatures between -25 and +70°C



PP compound



Compliant with the DTU standard 43.1 and 51.4



Capacity: 2.400 kg/m²



Tested on Broof T4 and BFL-S1

OTHER PEDESTALS




PV 2.3/3.5



PV 8/11



PV 3.5/5




PV 11/14



PV 5/8

PEDESTALS WALL VERSION



AK 3.5/5



AK 5/8

TOP PLATES

For tiles



C2/4T

For wood



CPV+



C3/4T


Other



C0



C6/4T



STICKSOL

ACCESSOIRES

Extension piece



F30



AF100

Slope corrector



HS2



HA5

Fitting pieces



1 - 3 mm

Tilelock visible



Tilelock invisible



PACKAGING

Bag

Dimensions 1.450 x 750 mm
57,09 x 29,53 inch

Gross weight 13 kg
Quantity 40 pieces/bag

Pallet

Dimensions 1.200 x 1.100 x 2.000 mm
47,24 x 43,31 x 7 8,74 inch

Gross weight 1 66 kg
Quantity 12 pieces/bag – 480 pieces



COMFORT - PV 14/17

TECHNICAL
DATASHEET

LOAD/M²

Wood


Every 600 mm l/w	1.350 kg/m ²
Every 500 mm l/w	2.400 kg/m ²
Every 400 mm l/w	3.750 kg/m ²

Tiles

600 x 600 mm (2,25 pcs/m ²)	1.350 kg/m ²
500 x 500 mm (4,00 pcs/m ²)	2.400 kg/m ²
400 x 400 mm (6,25 pcs/m ²)	3.750 kg/m ²

PRESSURE TEST (ZWICK)

1.560 kg

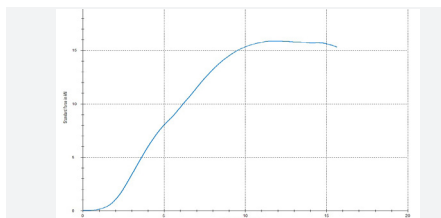

Discover here our
contribution to a sustainable
world:



The calculation is valid with proper placement and installation without extension pieces. For a taller construction with extension pieces, these results are not applicable. A minimum of 1.5 threads must be threaded into the pedestal.

